
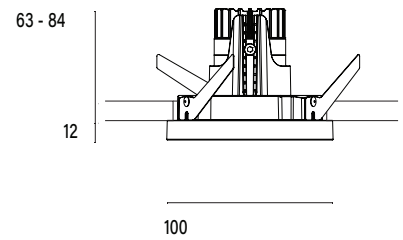


Accent 100 Recessed Type 1

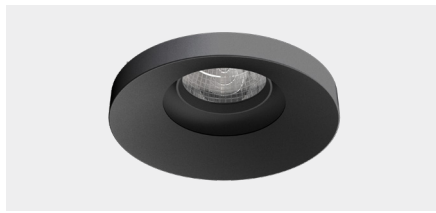

Model




Code	100 10 0001 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W		
Power (System)	8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	576/ 626/ 624	642/ 680/ 672	612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 90mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		



Accent 100 Recessed Type 1

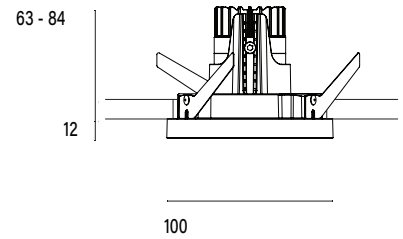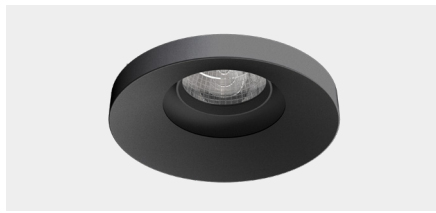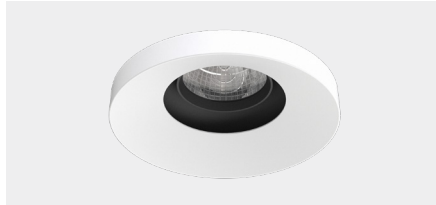




Model

Code	100 10 0001 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	Ø92 x 90mm
Ingress Protection	IP20
Control Device	Control Excluded
Class	III

Accent 100 Recessed Type 1

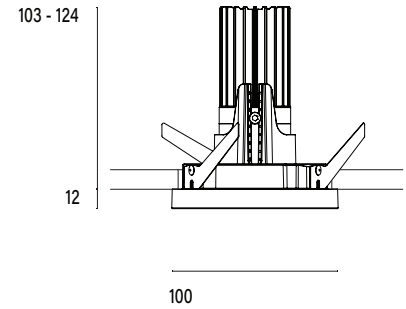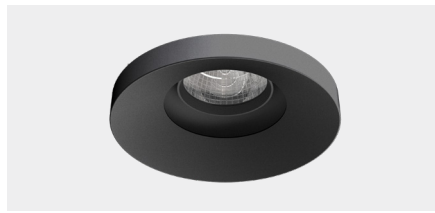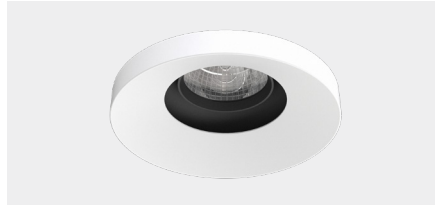

Model



Code	100 10 0001 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W		
Power (System)	14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	874/ 853/ 882	852/ 931/ 965	1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 130mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		



Accent 100 Recessed Type 2

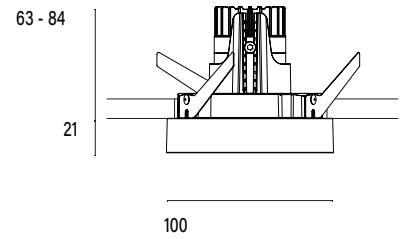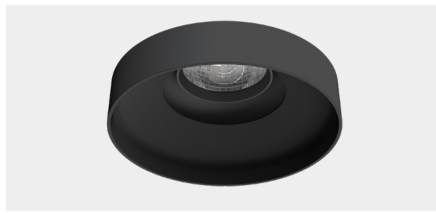

Model



Code	100 10 0002 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W		
Power (System)	8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	576/ 626/ 624	642/ 680/ 672	612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 90mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		



Accent 100 Recessed Type 2

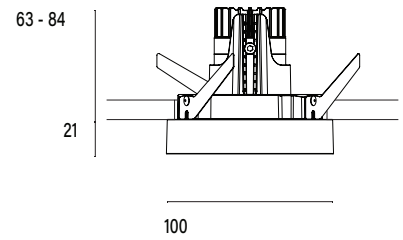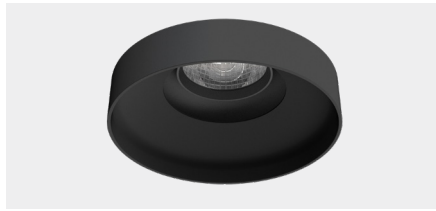


Model

Code	100 10 0002 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	Ø92 x 90mm
Ingress Protection	IP20
Control Device	Control Excluded
Class	III

Accent 100 Recessed Type 2

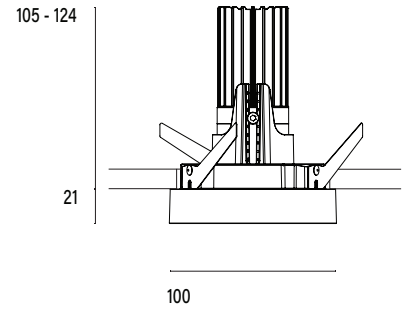

Model



Code	100 10 0002 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W		
Power (System)	14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	874/ 853/ 882	852/ 931/ 965	1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 130mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		



Accent 100 Recessed Type 3

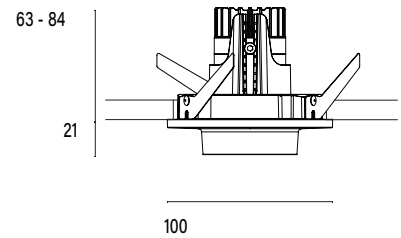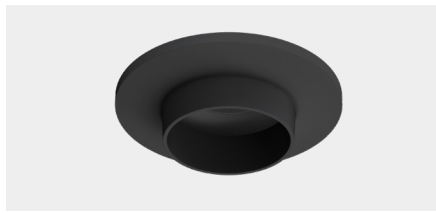

Model



Code	100 10 0003 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W		
Power (System)	8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	576/ 626/ 624	642/ 680/ 672	612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 90mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		



Accent 100 Recessed Type 3

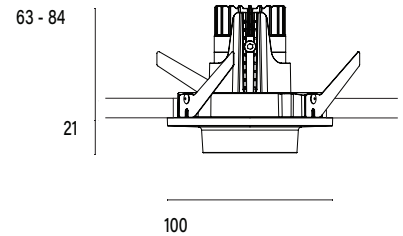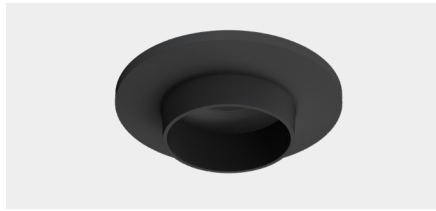



Model

Code	100 10 0003 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	Ø92 x 90mm
Ingress Protection	IP20
Control Device	Control Excluded
Class	III

Accent 100 Recessed Type 3

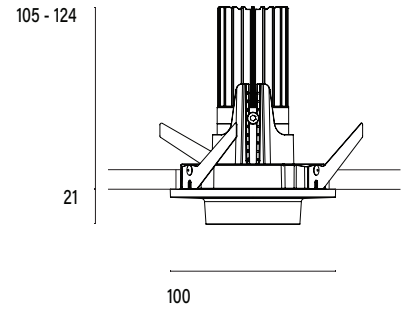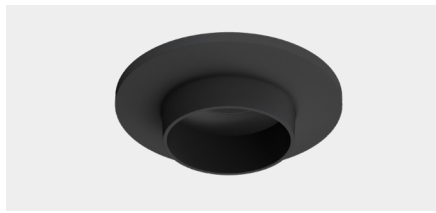

Model

Code	100 10 0003 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W		
Power (System)	14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	874/ 853/ 882	852/ 931/ 965	1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	Ø92 x 130mm		
Ingress Protection	IP20		
Control Device	Control Excluded		
Class	III		

