


Accent 100 Trimless Type 2

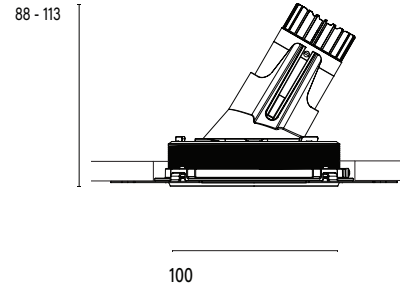

Model


Code	100 10 011200.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

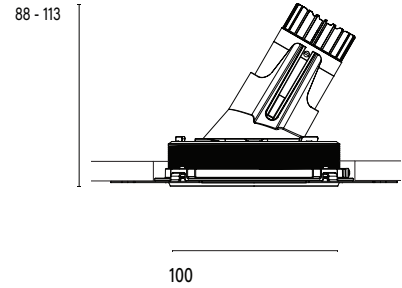

Model



Code	100 10 011200.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

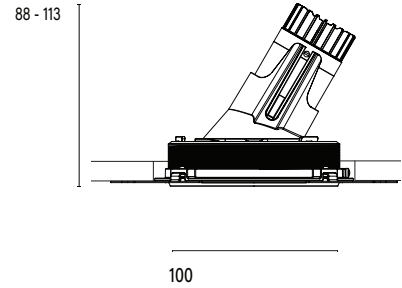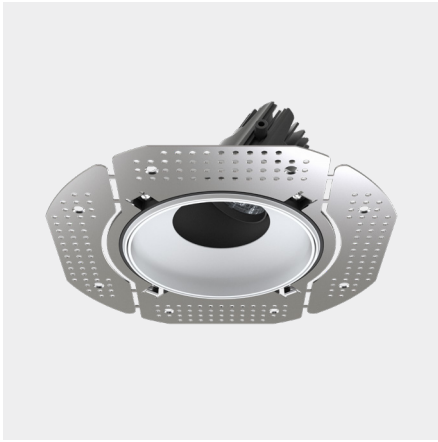

Model


Code	100 10 011201.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

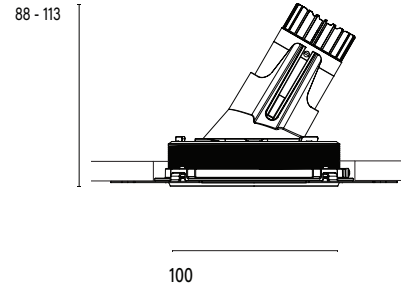

Model



Code	100 10 011201.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

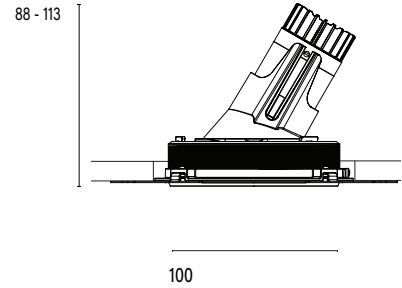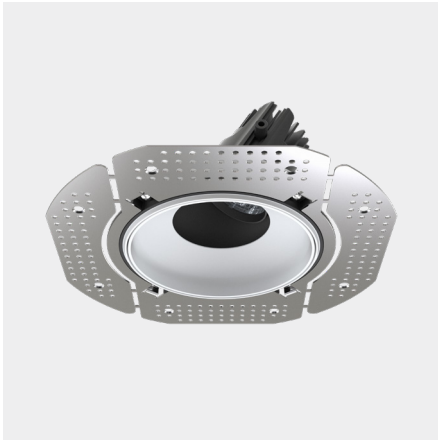

Model


Code	100 10 011202.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

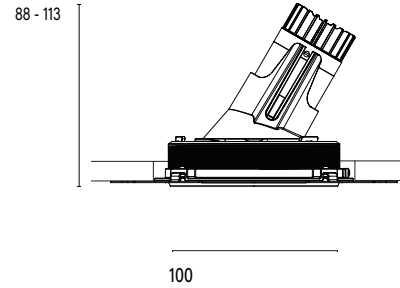

Model



Code	100 10 011202.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

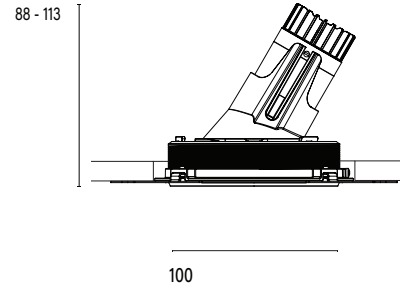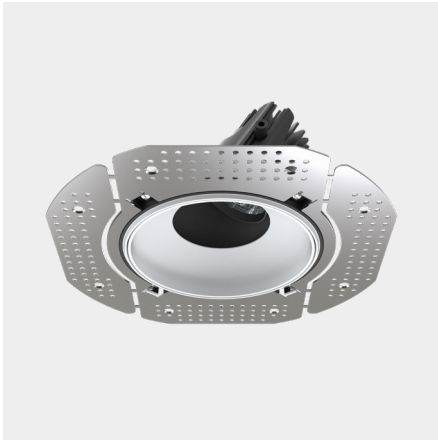

Model


Code	100 10 011203.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

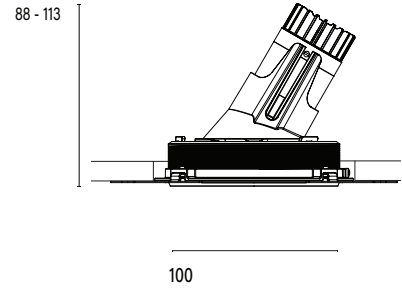

Model


Code	100 10 011203.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

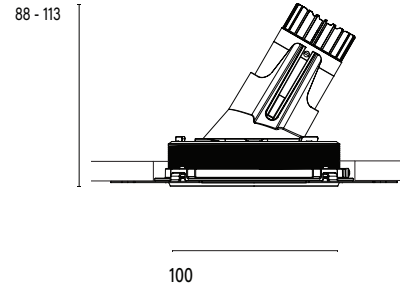

Model


Code	100 10 011204.010
Installation	Trimless - Indoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP20
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

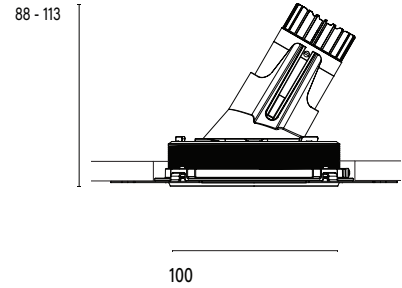

Model



Code	100 10 011204.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

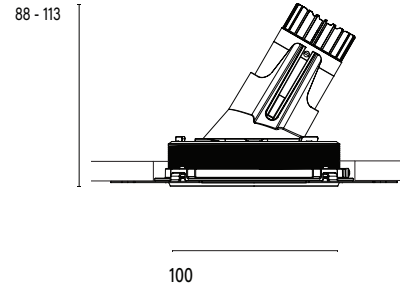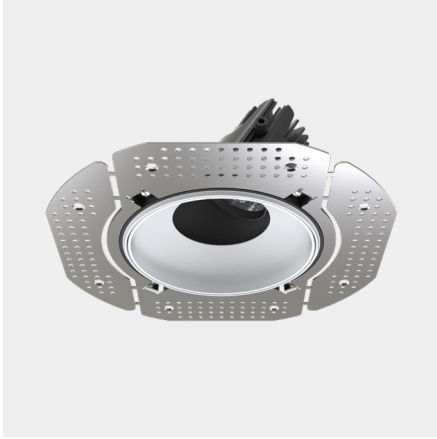

Model


Code	100 10 011205.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

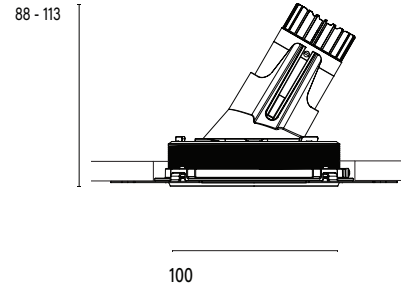

Model



Code	100 10 011205.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

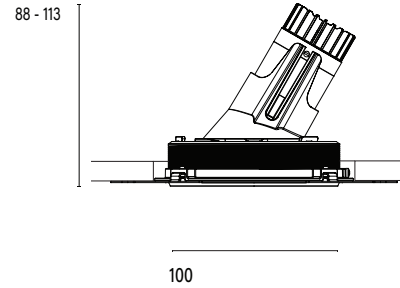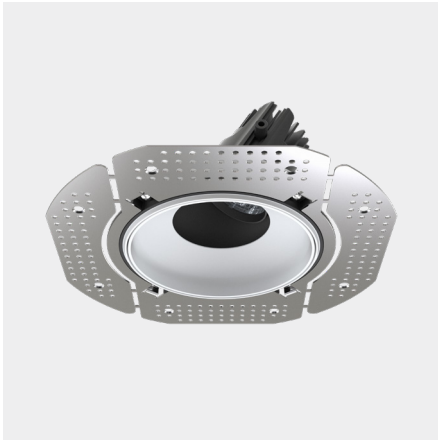

Model


Code	100 10 011206.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

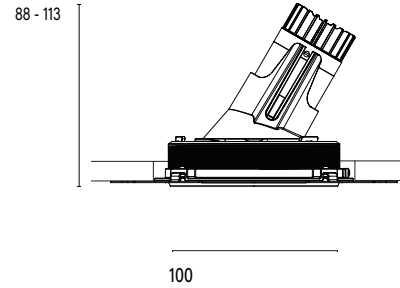

Model



Code	100 10 011206.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

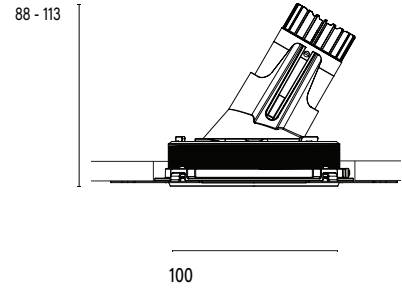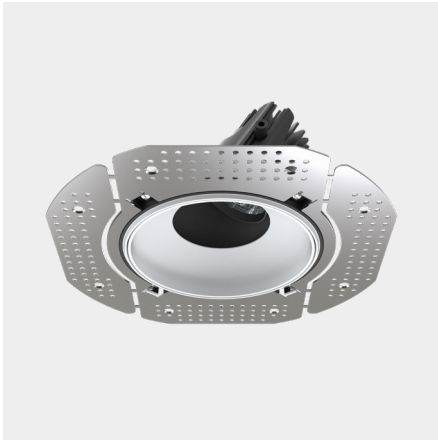

Model


Code	100 10 011207.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

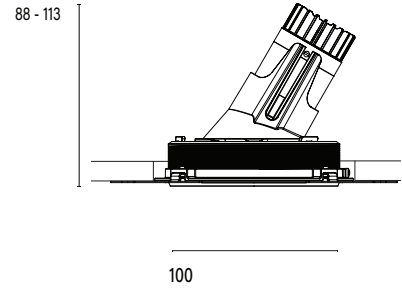

Model


Code	100 10 011207.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

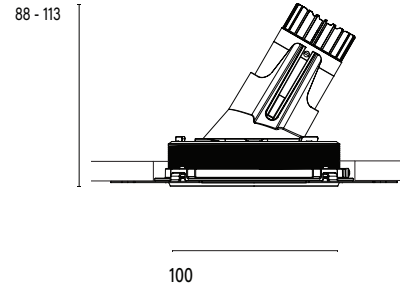

Model


Code	100 10 011208.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

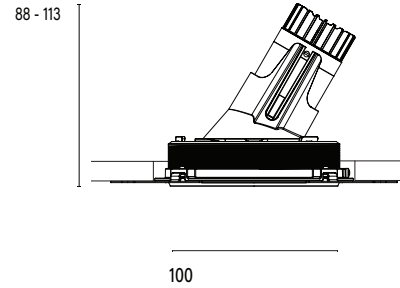

Model



Code	100 10 011208.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

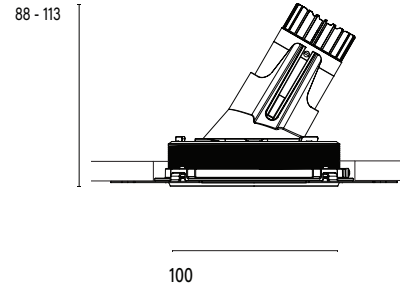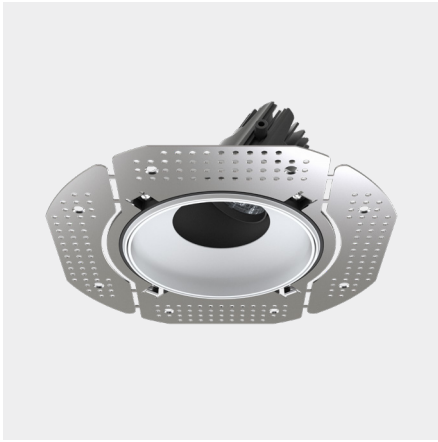

Model


Code	100 10 011209.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

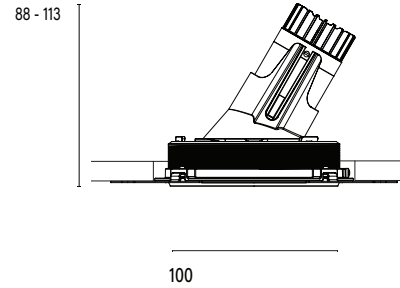

Model



Code	100 10 011209.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

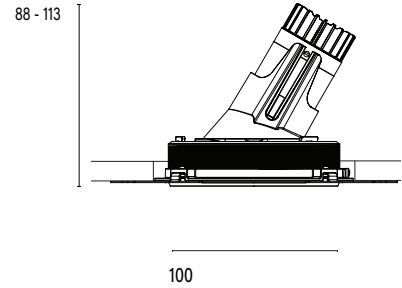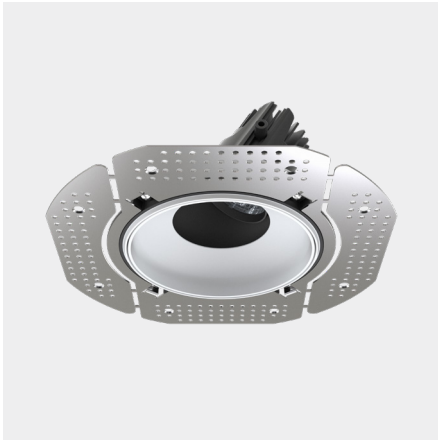

Model


Code	100 10 011210.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

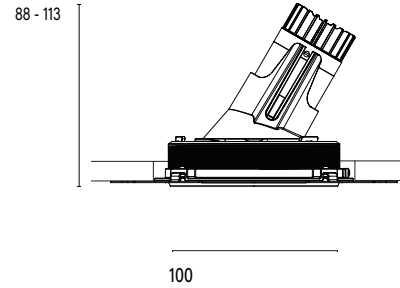

Model


Code	100 10 011210.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

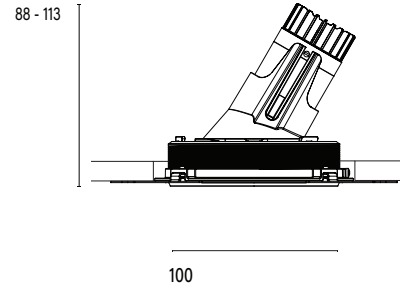

Model


Code	100 10 011211.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

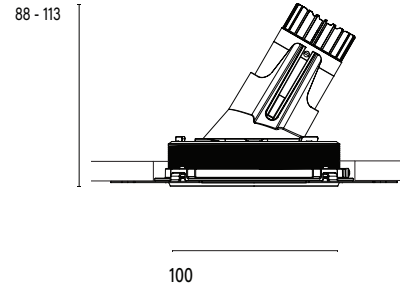

Model

Code	100 10 011211.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 115mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

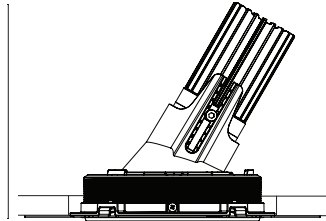

100

Model

Code	100 10 011212.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

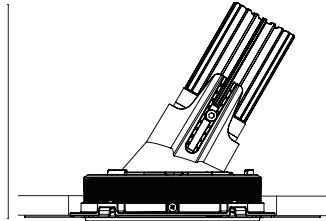

100

Model

Code	100 10 011212.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

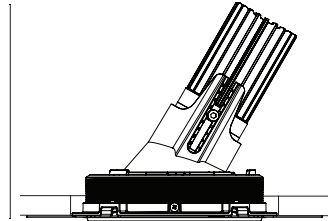

100

Model

Code	100 10 011213.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

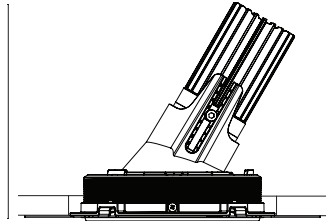

100

Model

Code	100 10 011213.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

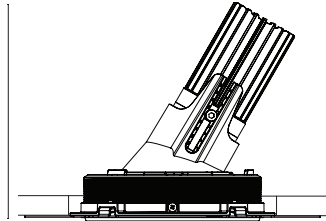

100

Model

Code	100 10 011214.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

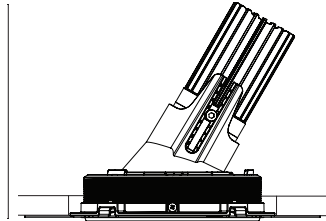

100

Model


Code	100 10 011214.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

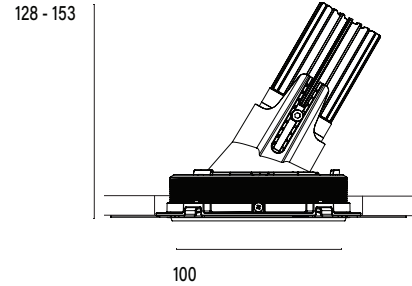

Model

Code	100 10 011215.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

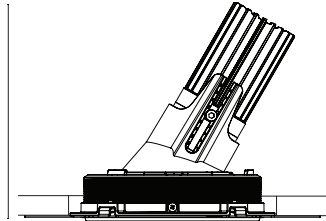

100

Model

Code	100 10 011215.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

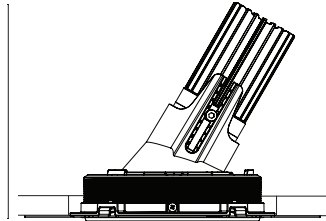

100

Model

Code	100 10 011216.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

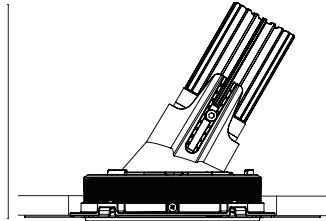

100

Model

Code	100 10 011216.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

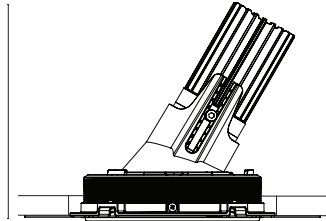

100

Model

Code	100 10 011217.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

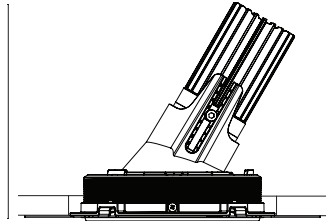

100

Model

Code	100 10 011217.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

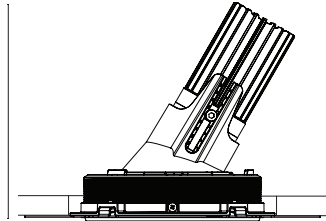

100

Model

Code	100 10 011218.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

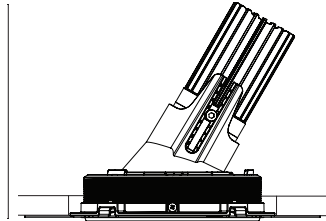

100

Model

Code	100 10 011218.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

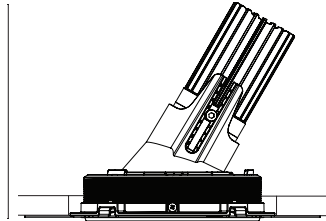

100

Model

Code	100 10 011219.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

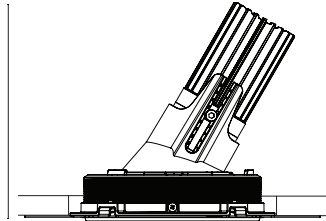

100

Model

Code	100 10 011219.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

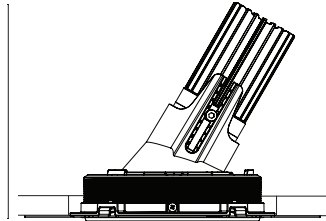

100

Model

Code	100 10 011220.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2



128 - 153

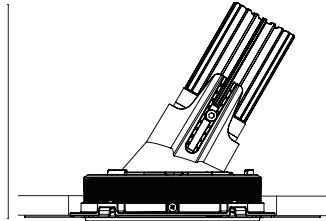

100

Model

Code	100 10 011220.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Asymmetrical
Cut-Out	Ø130 x 155mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

