


Accent 100 Trimless Type 2

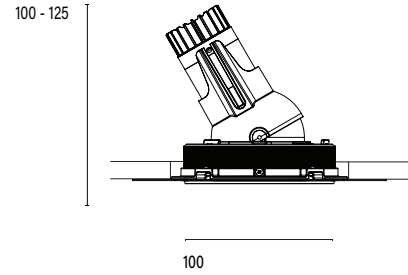

Model


Code	100 10 010200.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

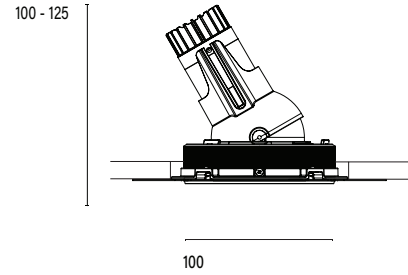

Model


Code	100 10 010200.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

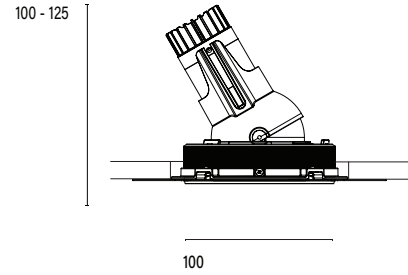

Model


Code	100 10 010201.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

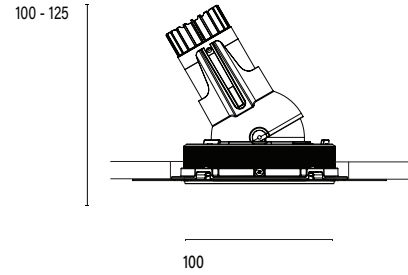

Model


Code	100 10 010201.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

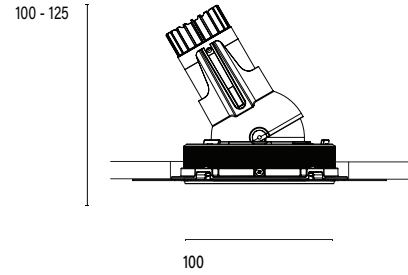

Model


Code	100 10 010202.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

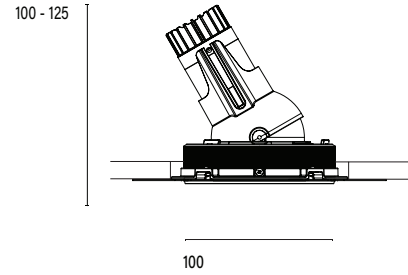

Model


Code	100 10 010202.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

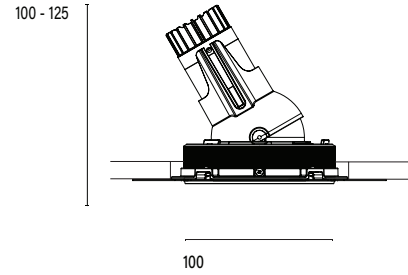

Model


Code	100 10 010203.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

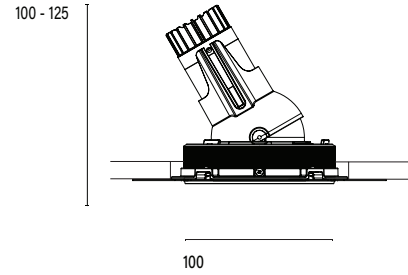

Model


Code	100 10 010203.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

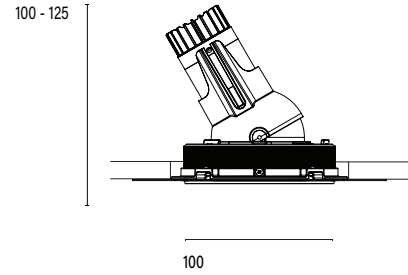

Model


Code	100 10 010204.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

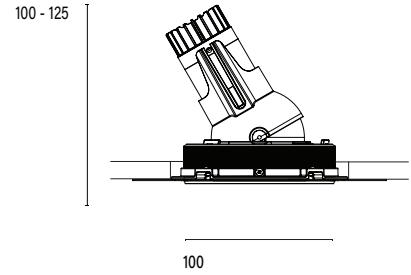


Model

Code	100 10 010204.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

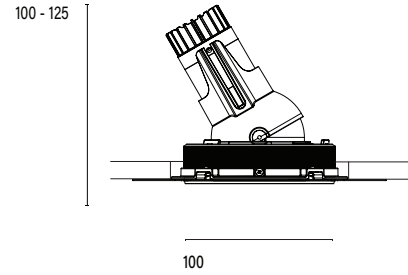

Model


Code	100 10 010205.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

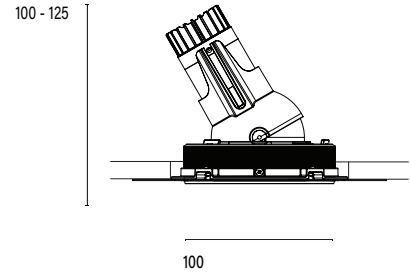

Model


Code	100 10 004205.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

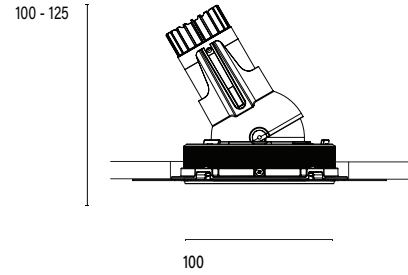

Model


Code	100 10 010206.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

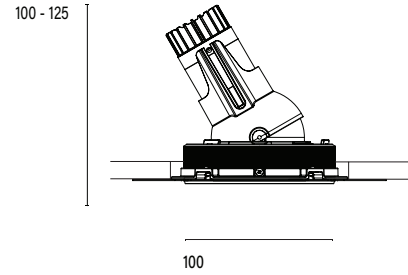

Model


Code	100 10 010206.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

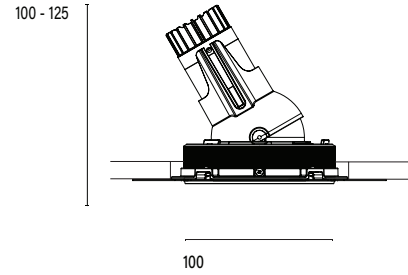

Model


Code	100 10 010207.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

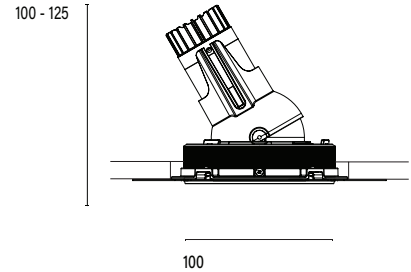

Model


Code	100 10 010207.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

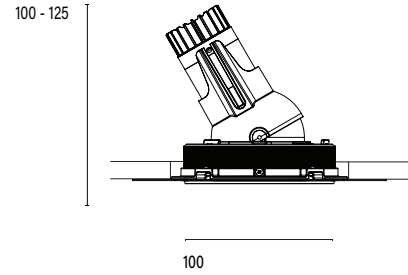

Model


Code	100 10 010208.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

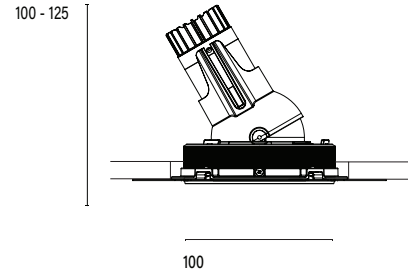

Model


Code	100 10 010208.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

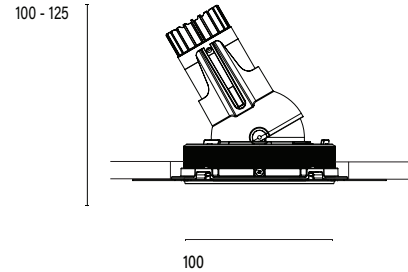

Model


Code	100 10 010209.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

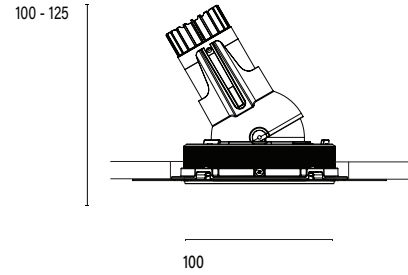

Model


Code	100 10 010209.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

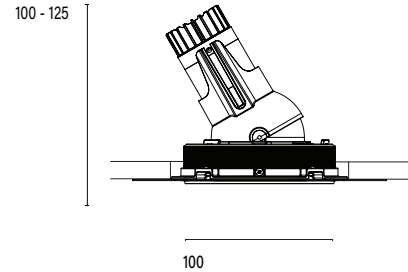

Model


Code	100 10 010210.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

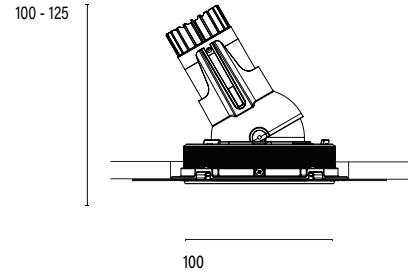

Model


Code	100 10 010210.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

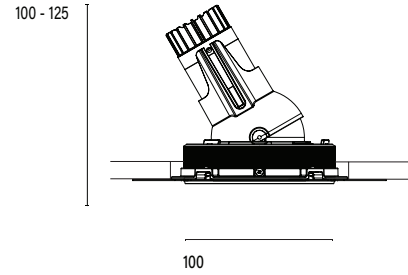

Model


Code	100 10 010211.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

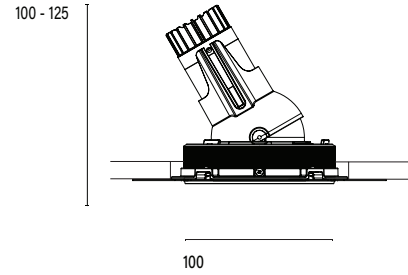

Model


Code	100 10 010211.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

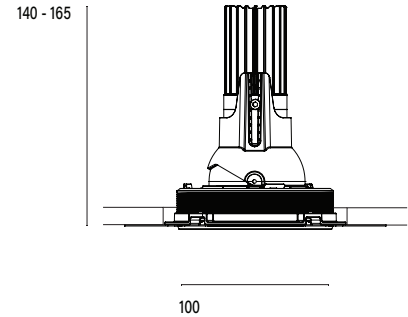


Model

Code	100 10 010212.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

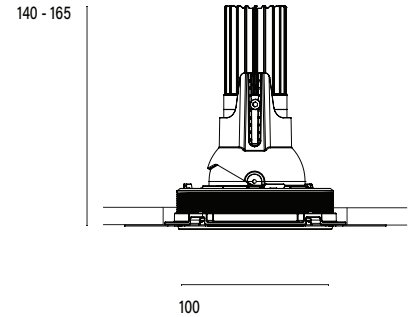

Model


Code	100 10 010212.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

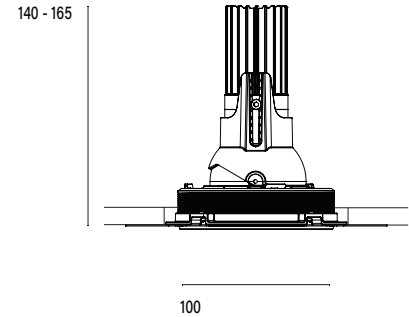

Model


Code	100 10 010213.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

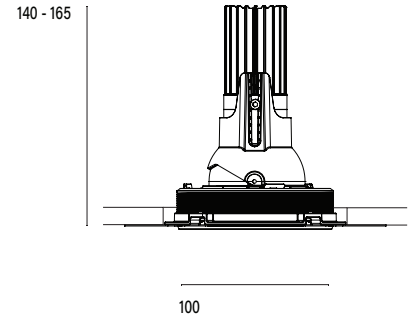


Model

Code	100 10 010213.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

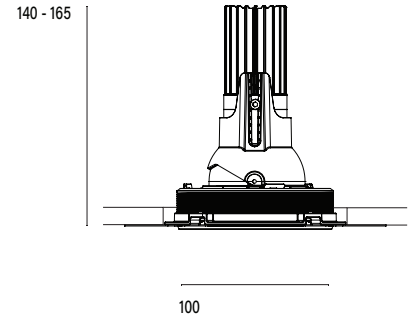

Model


Code	100 10 010214.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

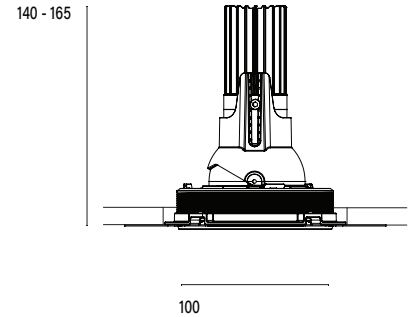


Model

Code	100 10 010214.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

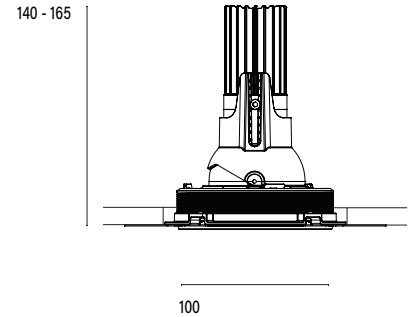

Model


Code	100 10 010215.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

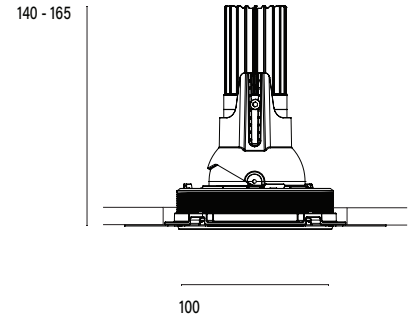

Model


Code	100 10 010215.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

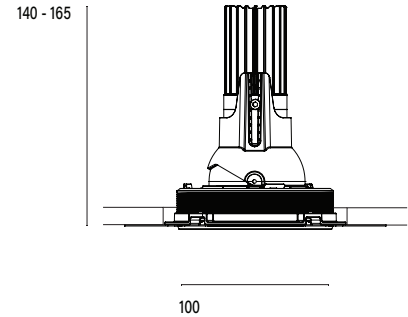

Model


Code	100 10 010216.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

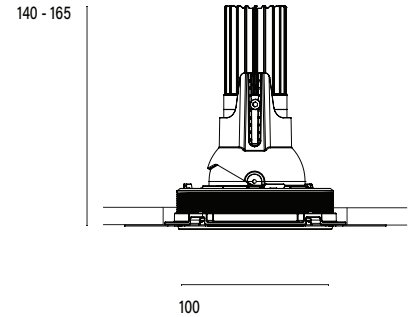

Model


Code	100 10 010216.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

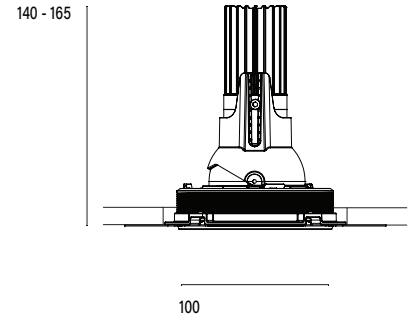

Model


Code	100 10 010217.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

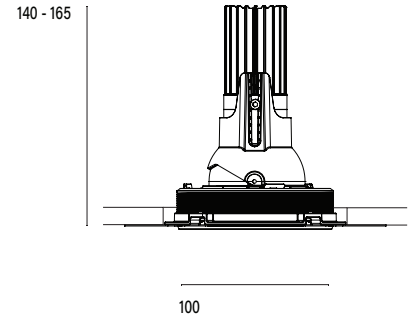

Model


Code	100 10 010217.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

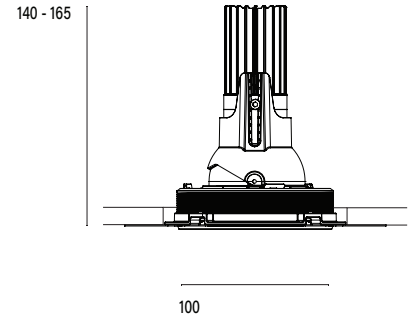

Model


Code	100 10 010218.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

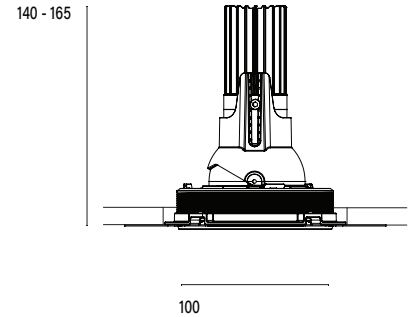


Model

Code	100 10 010218.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

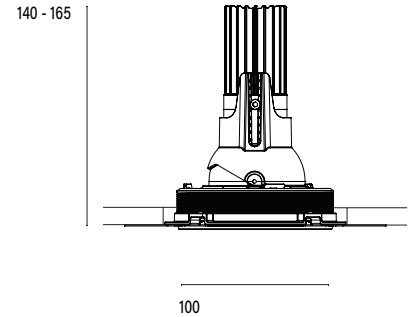

Model


Code	100 10 004219.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

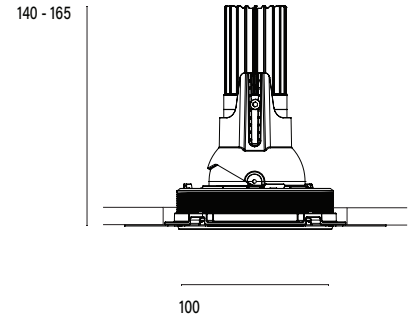


Model

Code	100 10 010219.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 2

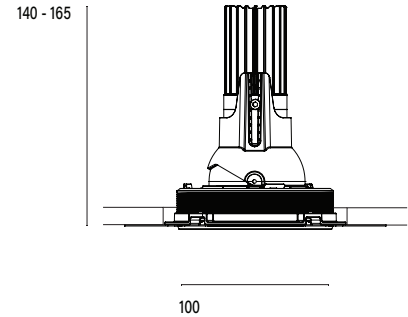

Model


Code	100 10 010220.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 2

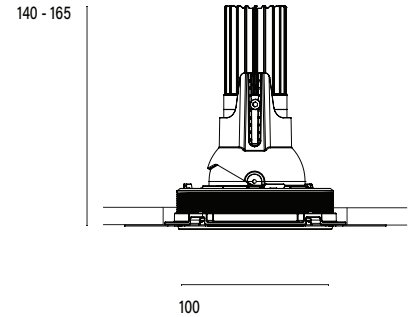



Model

Code	100 10 010220.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 3

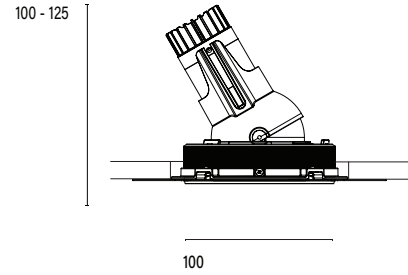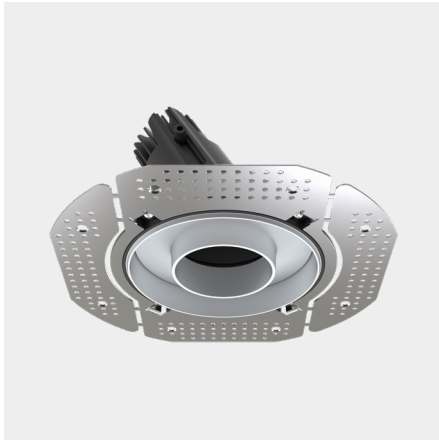

Model



Code	100 10 010300.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

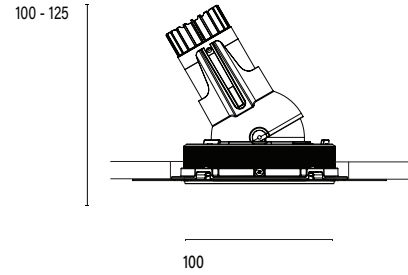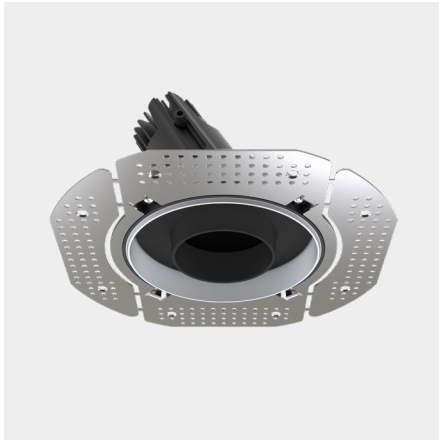

Model



Code	100 10 010300.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	576lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

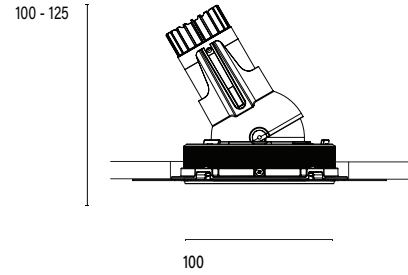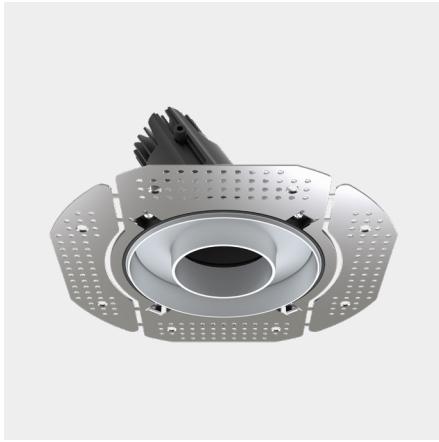

Model



Code	100 10 010301.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

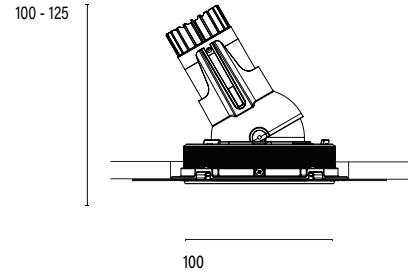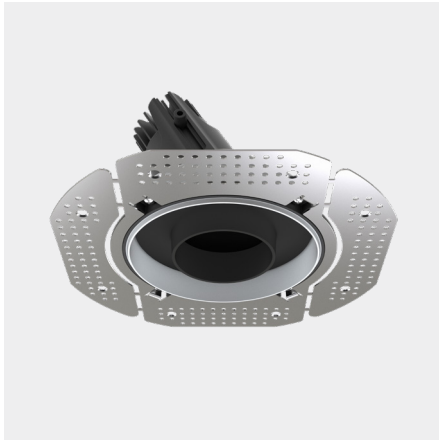

Model



Code	100 10 010301.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	626lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

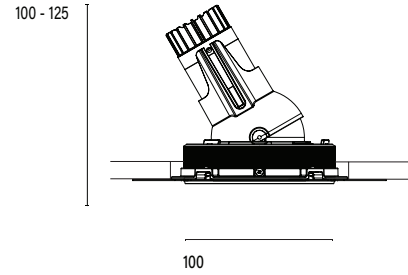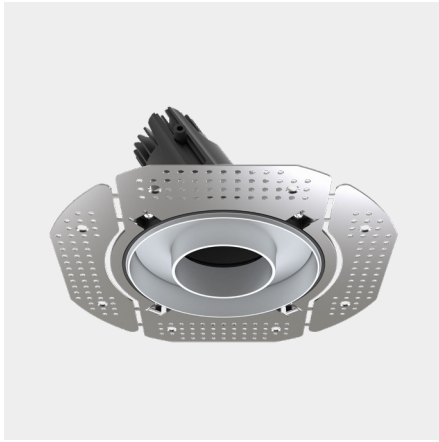

Model



Code	100 10 010302.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

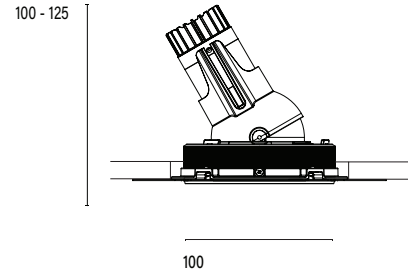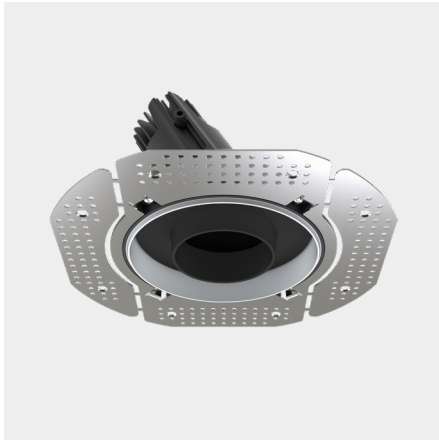

Model



Code	100 10 010302.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	624lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

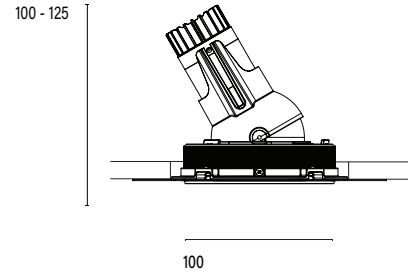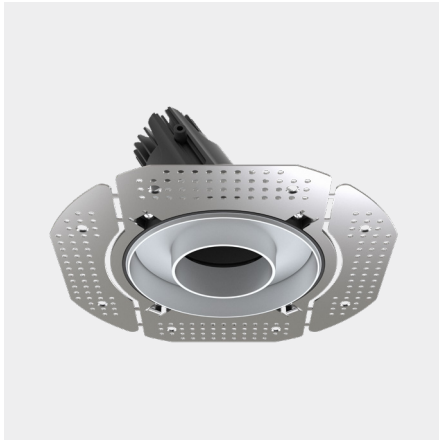

Model



Code	100 10 010303.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

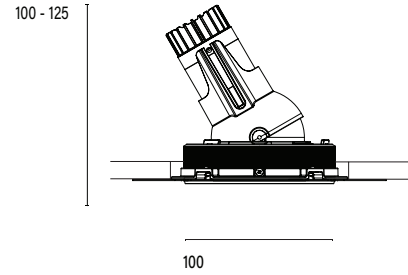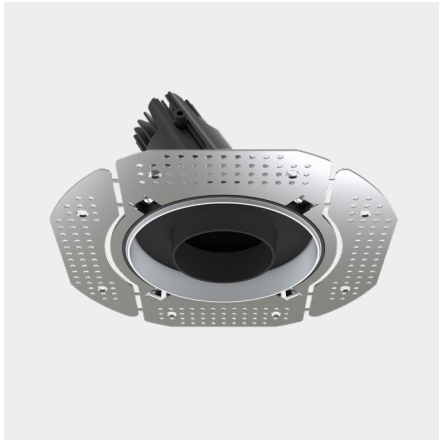

Model



Code	100 10 010303.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	642lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

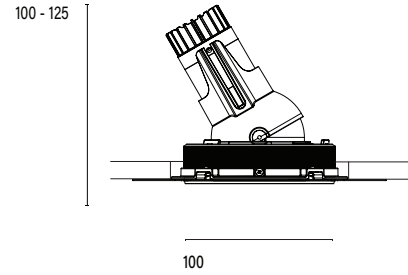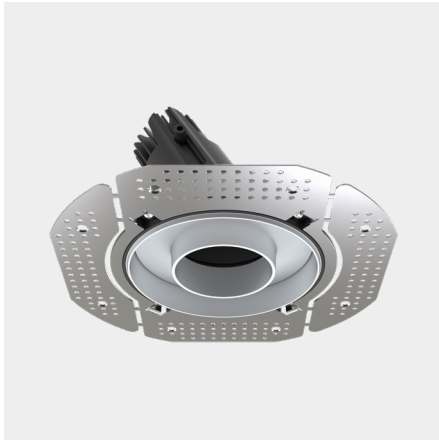

Model



Code	100 10 010304.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

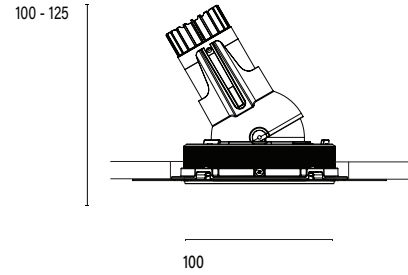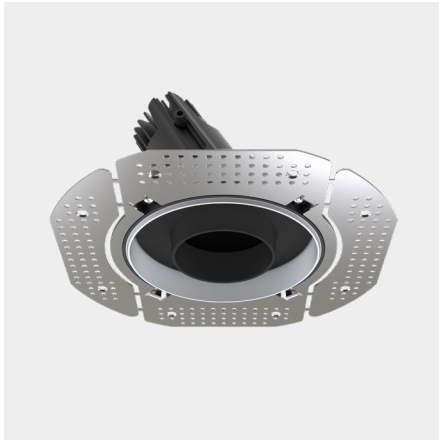

Model



Code	100 10 010304.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	680lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

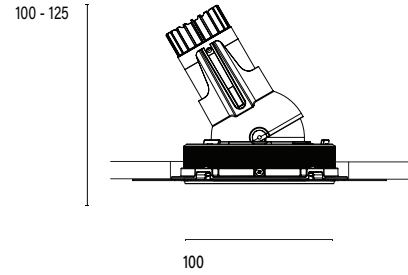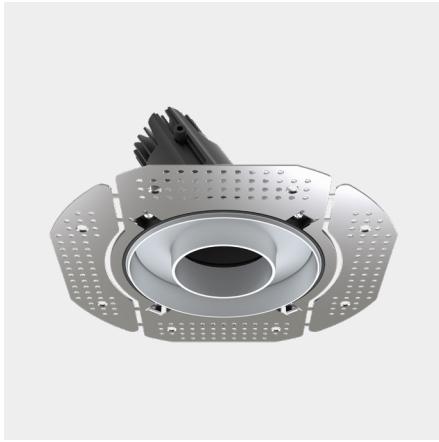

Model



Code	100 10 010305.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

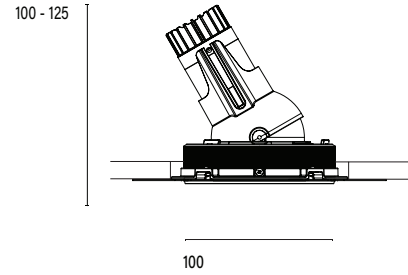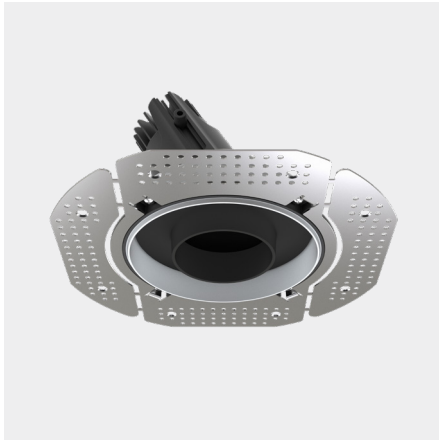

Model



Code	100 10 010305.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	672lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

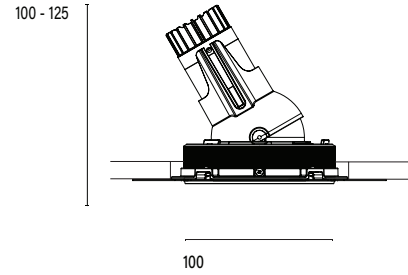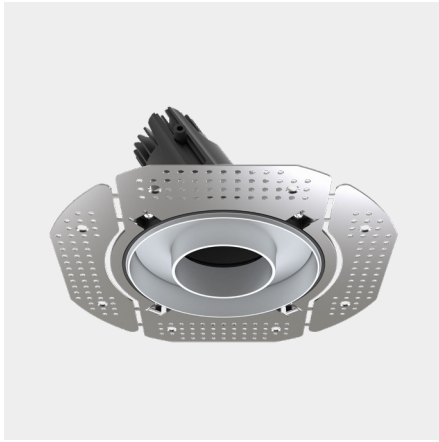

Model



Code	100 10 010306.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

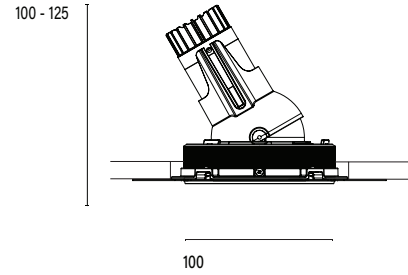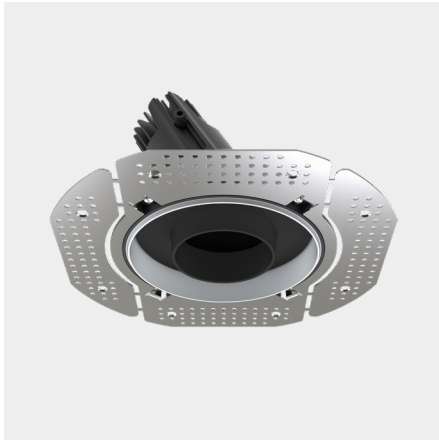

Model



Code	100 10 010306.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	612lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

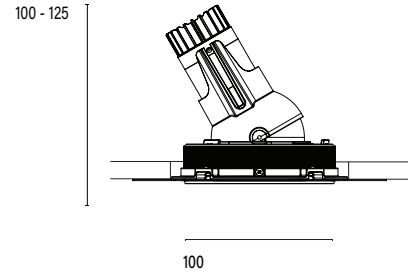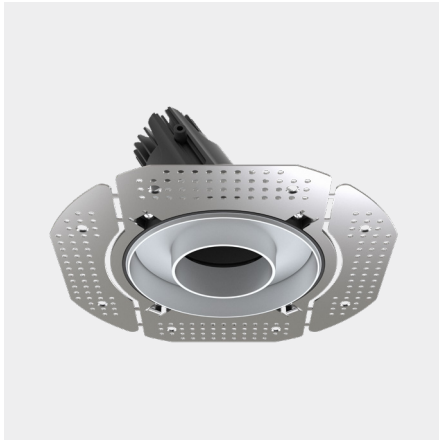

Model



Code	100 10 010307.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

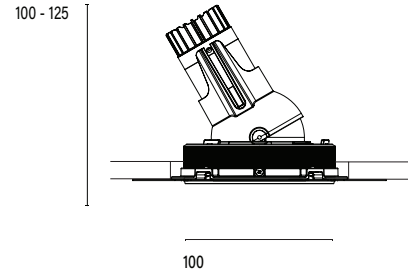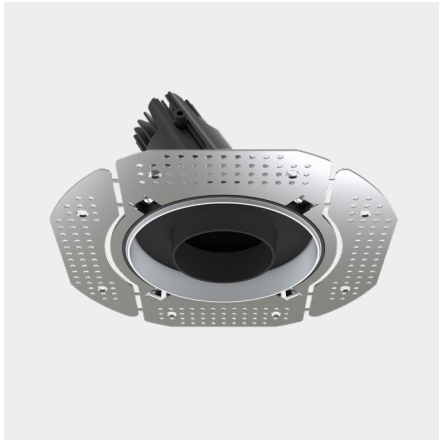

Model



Code	100 10 010307.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	614lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 1300mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

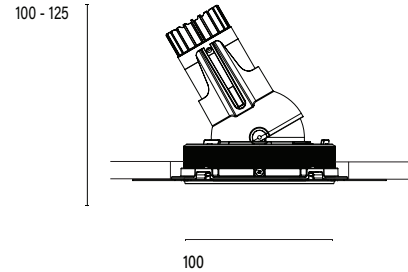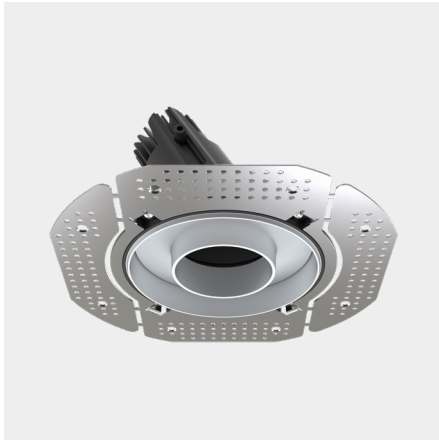

Model



Code	100 10 010308.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

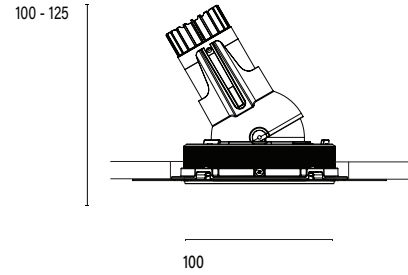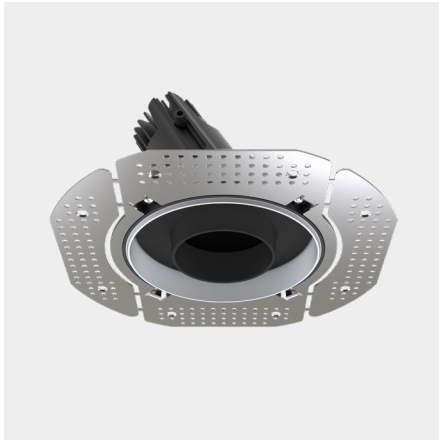

Model



Code	100 10 010308.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6.8W
Power (System)	8w
Voltage	240V-AC
Current	180mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	652lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

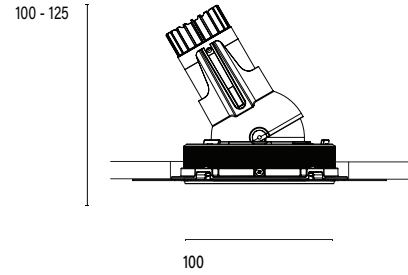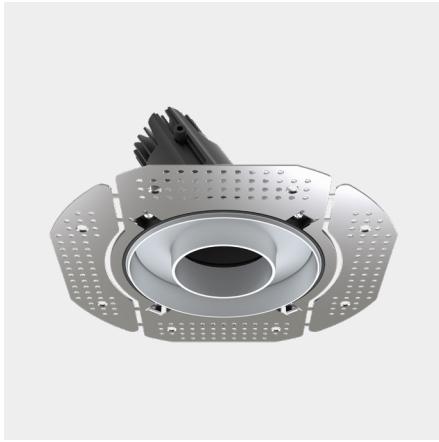

Model



Code	100 10 010309.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

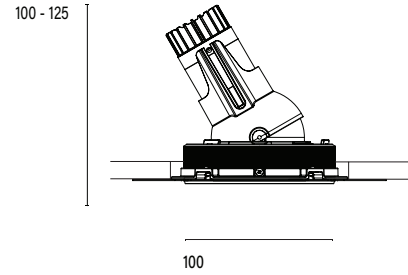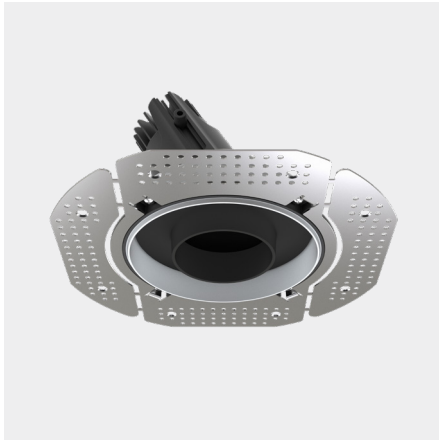

Model



Code	100 10 010309.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

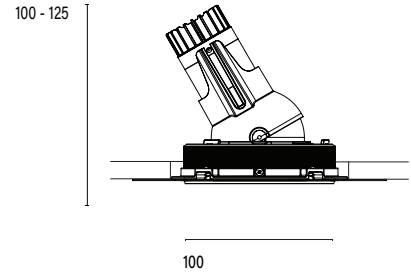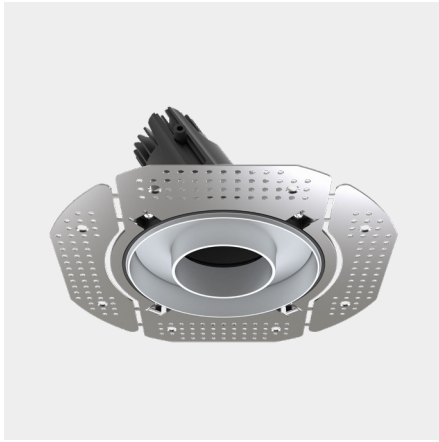

Model



Code	100 10 010310.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

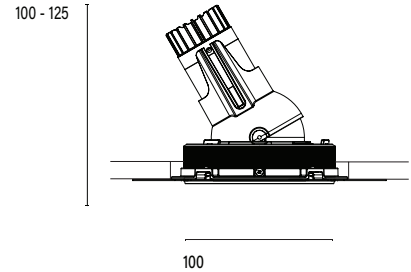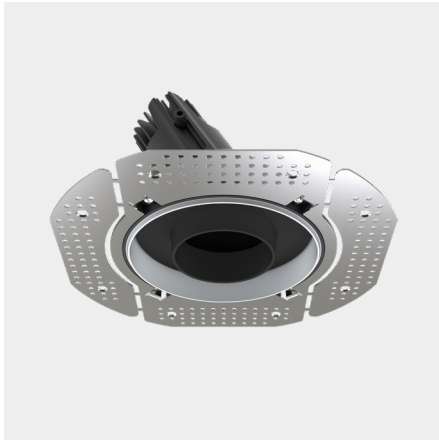

Model



Code	100 10 010310.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

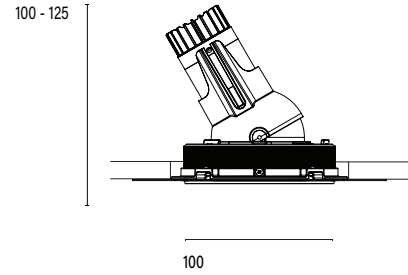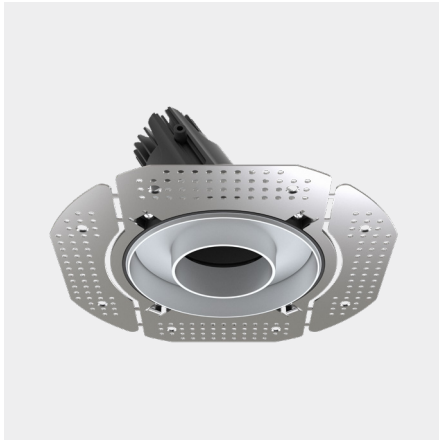

Model



Code	100 10 010311.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

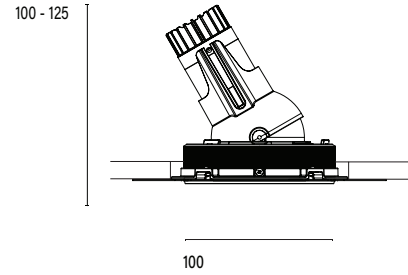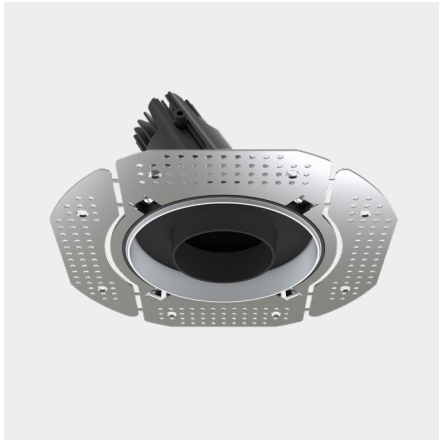

Model


Code	100 10 010311.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	6W
Power (System)	7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 130mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

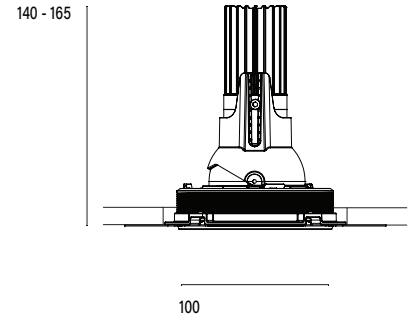

Model


Code	100 10 010312.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

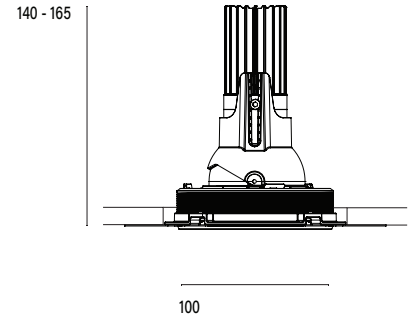

Model


Code	100 10 010312.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	2700K
Luminous Flux	874lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

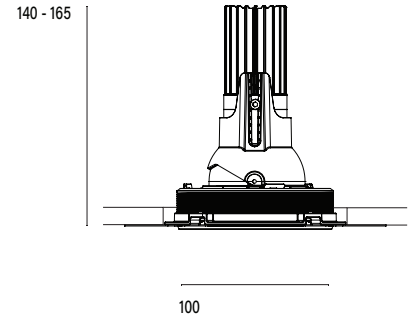


Model

Code	100 10 010313.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 3

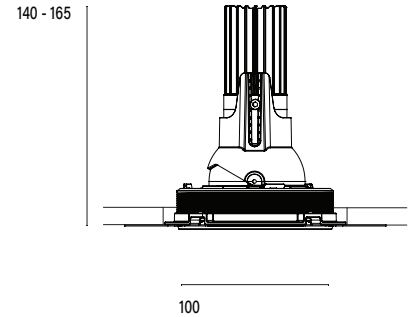

Model


Code	100 10 010313.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	2700K
Luminous Flux	853lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

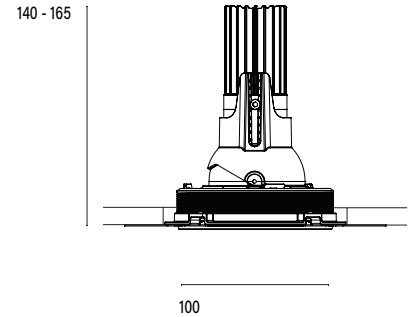

Model


Code	100 10 010314.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

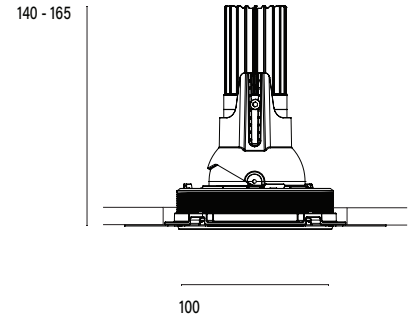

Model


Code	100 10 010314.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	2700K
Luminous Flux	882lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

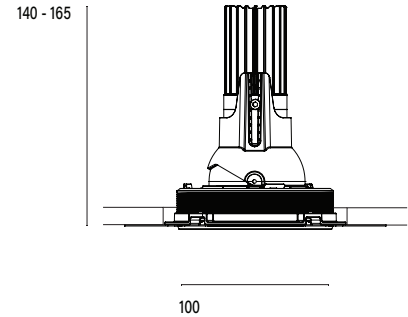

Model


Code	100 10 010315.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

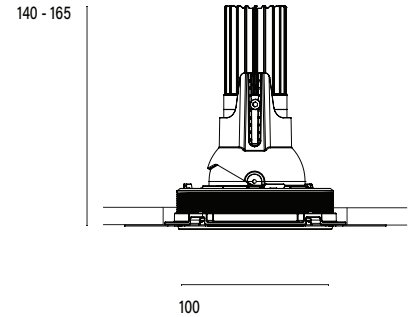

Model


Code	100 10 010315.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	3000K
Luminous Flux	952lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

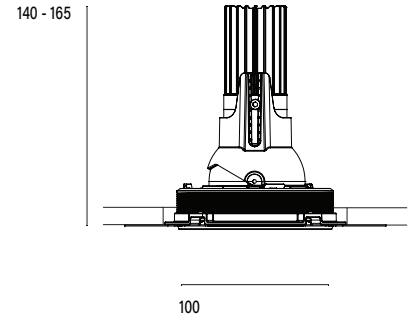

Model

Code	100 10 010316.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data


Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3



140 - 165

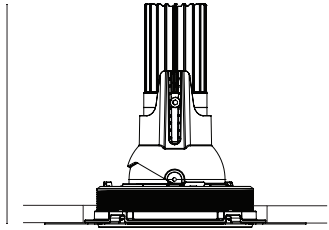

100

Model


Code	100 10 010316.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	3000K
Luminous Flux	931lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

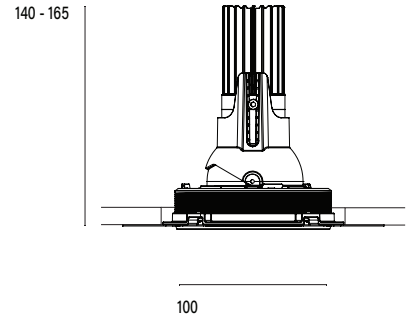

Model


Code	100 10 010317.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

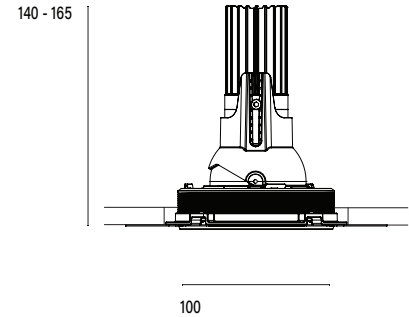

Model


Code	100 10 010317.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	3000K
Luminous Flux	965lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

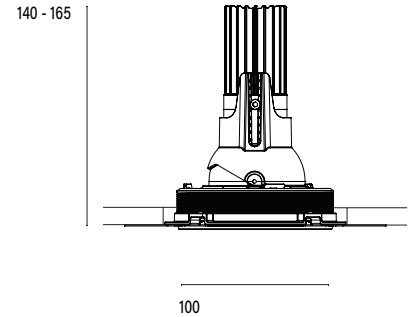


Model

Code	100 10 010318.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 3

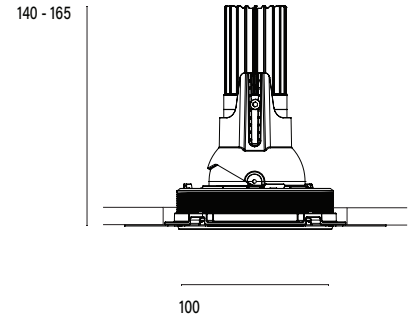

Model


Code	100 10 010318.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°
Colour Temperature	4000K
Luminous Flux	1044lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

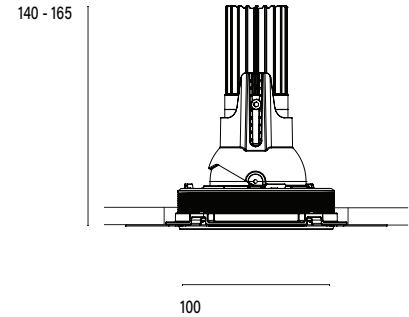


Model

Code	100 10 010319.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 3

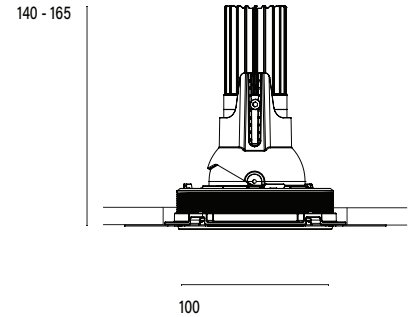


Model

Code	100 10 010319.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 40°
Colour Temperature	4000K
Luminous Flux	1020lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Accent 100 Trimless Type 3

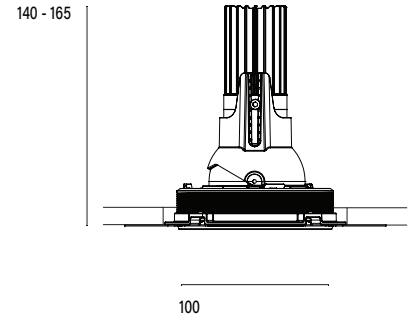

Model


Code	100 10 010320.010
Installation	Trimless - Indoor/ Outdoor
Finish	Structured White
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Accent 100 Trimless Type 3

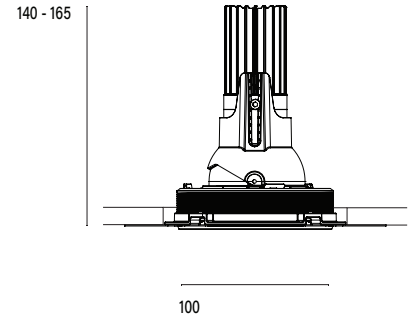

Model

Code	100 10 010320.020
Installation	Trimless - Indoor/ Outdoor
Finish	Structured Black
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	12W
Power (System)	14w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 60°
Colour Temperature	4000K
Luminous Flux	1049lm
TM30	Rf95 Rg103
CRI	Ra97
Lumen Maintenance	L90 B10 50000hrs
Chromaticity	<2 McAdam Step Ellipse
Articulation	Directional
Cut-Out	Ø130 x 170mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

