
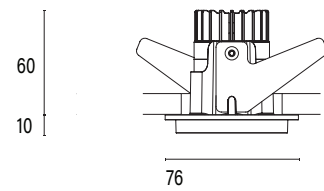


Mono 060² Recessed Type 1

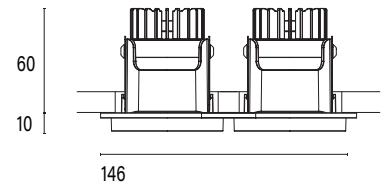

Model



Code	101 06 0071 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6.8W		
Power (System)	2x 8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 576/ 626/ 624	2x 642/ 680/ 672	2x 612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 65mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 060² Recessed Type 1

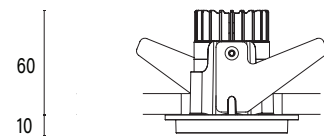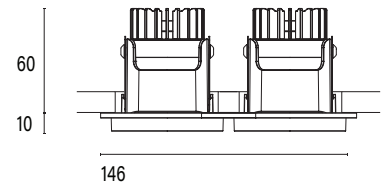


Model

Code	101 06 0071 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6W
Power (System)	2x 7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	2x Ø55 x 65mm - Centre-to-centre distance 70mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III

Mono 060² Recessed Type 1

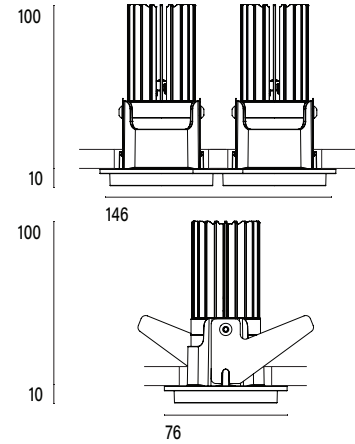

Model



Code	101 06 0071 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 874/ 853/ 882	2x 852/ 931/ 965	2x 1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromaticity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 105mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 060² Recessed Type 2

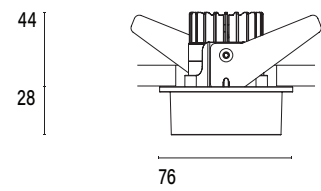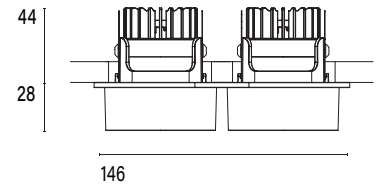

Model



Code	101 06 0072 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6.8W		
Power (System)	2x 8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 576/ 626/ 624	2x 642/ 680/ 672	2x 612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromaticity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 50mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 060² Recessed Type 2

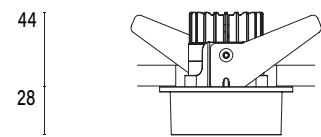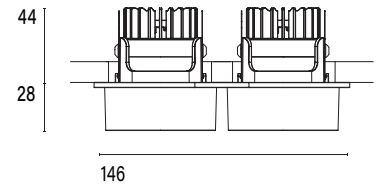

Model


Code	101 06 0072 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6W
Power (System)	2x 7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	2x Ø55 x 50mm - Centre-to-centre distance 70mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Mono 060² Recessed Type 2

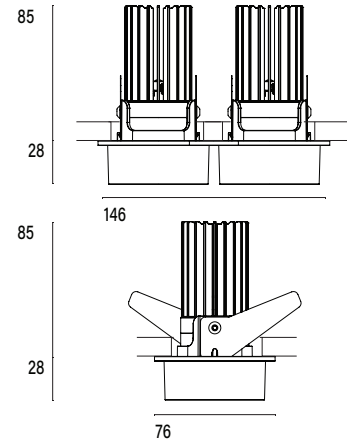

Model



Code	101 06 0072 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 874/ 853/ 882	2x 852/ 931/ 965	2x 1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromaticity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 90mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 060² Recessed Type 3

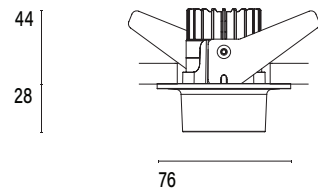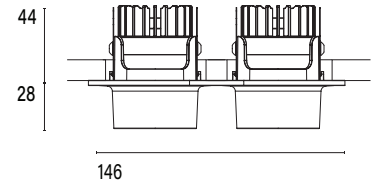

Model



Code	101 06 0073 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6.8W		
Power (System)	2x 8w		
Voltage	240V-AC		
Current	180mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 576/ 626/ 624	2x 642/ 680/ 672	2x 612/ 614/ 652
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 50mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 060² Recessed Type 3

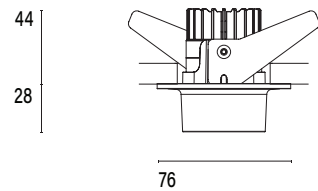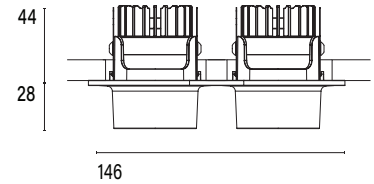

Model


Code	101 06 0073 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 6W
Power (System)	2x 7w
Voltage	240V-AC
Current	350mA
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°
Colour Temperature	2700K - 1800K
TM30	Rf95 Rg103
CRI	Ra90
Lumen Maintenance	L90 B10 50000hrs
Chromacity	<2 McAdam Step Ellipse
Articulation	Fixed
Cut-Out	2x Ø55 x 50mm - Centre-to-centre distance 70mm
Ingress Protection	IP44
Control Device	Control Excluded
Class	III



Mono 060² Recessed Type 3

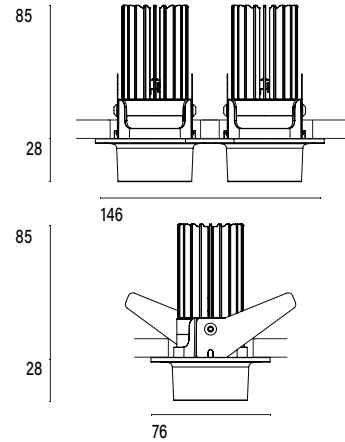

Model

Code	101 06 0073 --,---
Installation	Recessed - Indoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 25°/ 40°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 874/ 853/ 882	2x 852/ 931/ 965	2x 1044/ 1020/ 1049
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø55 x 90mm - Centre-to-centre distance 70mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		

