


Mono 100² Recessed Type 1

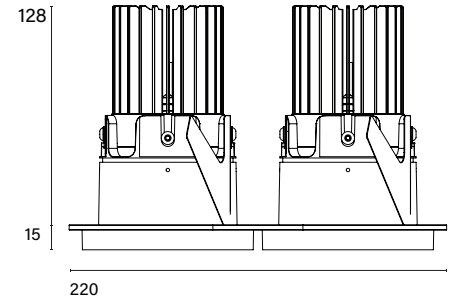

Model



Code	101 10 0071 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 956/ 1013/ 981	2x 953/ 942/ 1037	2x 1127/ 1095/ 1132
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 140mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 1

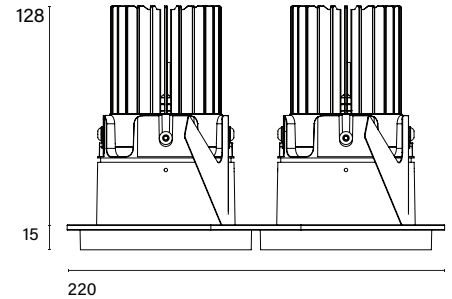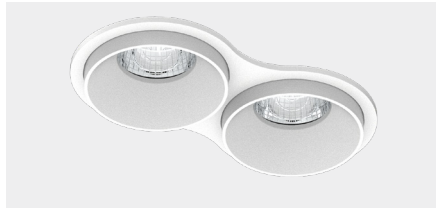

Model


Code	101 10 0071 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 16W		
Power (System)	2x 19w		
Voltage	240V-AC		
Current	500mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1314/ 1300/ 1350	2x 1320/ 1300/ 1436	2x 1548/ 1508/ 1568
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 140mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 1

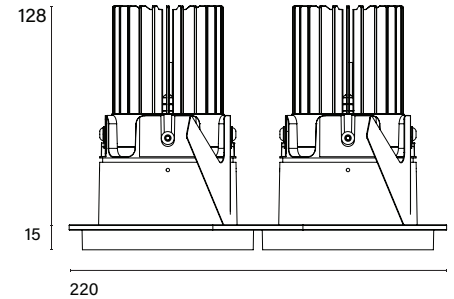

Model


Code	101 10 0071 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 24W		
Power (System)	2x 27w		
Voltage	240V-AC		
Current	700mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1763/ 1750/ 1765	2x 1781/ 1770/ 1939	2x 2091/ 2029/ 2110
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L80 B20 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 140mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 2

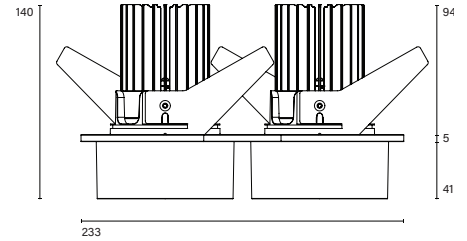

Model


Code	101 10 0072 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 956/ 1013/ 981	2x 953/ 942/ 1037	2x 1127/ 1095/ 1132
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 2

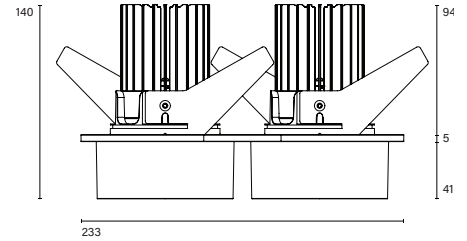

Model


Code	101 10 0072 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 16W		
Power (System)	2x 19w		
Voltage	240V-AC		
Current	500mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1314/ 1300/ 1350	2x 1320/ 1300/ 1436	2x 1548/ 1508/ 1568
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 2

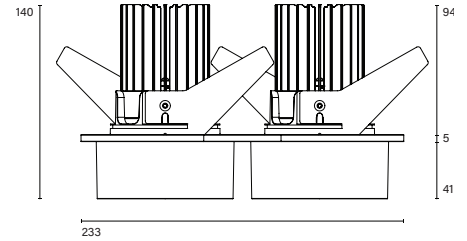

Model


Code	101 10 0072 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 24W		
Power (System)	2x 27w		
Voltage	240V-AC		
Current	700mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1763/ 1750/ 1765	2x 1781/ 1770/ 1939	2x 2091/ 2029/ 2110
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L80 B20 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 3

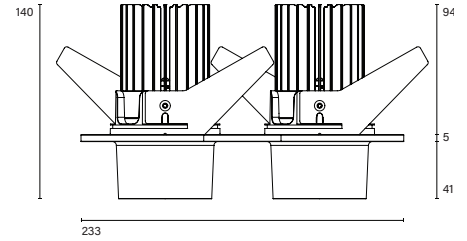

Model


Code	101 10 0073 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 12W		
Power (System)	2x 14w		
Voltage	240V-AC		
Current	350mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux (lm)	2x 956/ 1013/ 981	2x 953/ 942/ 1037	2x 1127/ 1095/ 1132
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 3

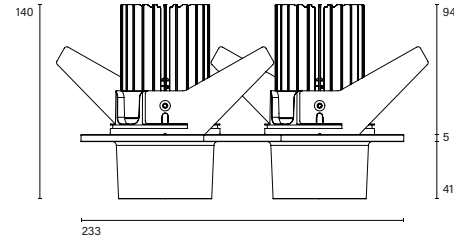

Model


Code	101 10 0073 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 16W		
Power (System)	2x 19w		
Voltage	240V-AC		
Current	500mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1314/ 1300/ 1350	2x 1320/ 1300/ 1436	2x 1548/ 1508/ 1568
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L90 B10 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		



Mono 100² Recessed Type 3

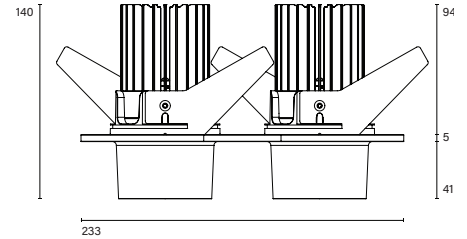

Model

Code	101 10 0073 --,---
Installation	Recessed - Indoor/ Outdoor
Finish	Structured White/ Structured Black/ Custom
Material	Marine Grade Aluminium

Technical Data

Power (Luminaire)	2x 24W		
Power (System)	2x 27w		
Voltage	240V-AC		
Current	700mA		
Optics	Rotationally Symmetrical Direct 15°/ 30°/ 60°		
Colour Temperature	2700K	3000K	4000K
Luminous Flux	2x 1763/ 1750/ 1765	2x 1781/ 1770/ 1939	2x 2091/ 2029/ 2110
TM30	Rf95 Rg103		
CRI	Ra97		
Lumen Maintenance	L80 B20 50000hrs		
Chromacity	<2 McAdam Step Ellipse		
Articulation	Fixed		
Cut-Out	2x Ø85 x 110mm - Centre-to-centre distance 110mm		
Ingress Protection	IP44		
Control Device	Control Excluded		
Class	III		

