


## Accent 100 Trimless Type 2

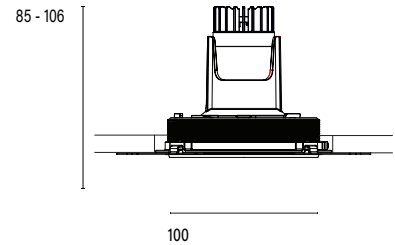

### Model


<b>Code</b>	100 10 009200.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	576lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

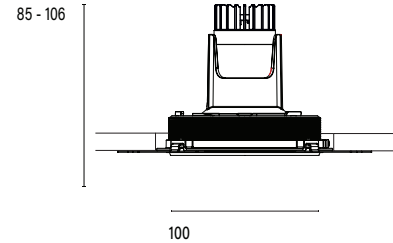

### Model


<b>Code</b>	100 10 009200.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	576lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

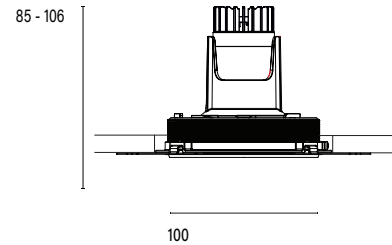

### Model


<b>Code</b>	100 10 009201.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	626lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

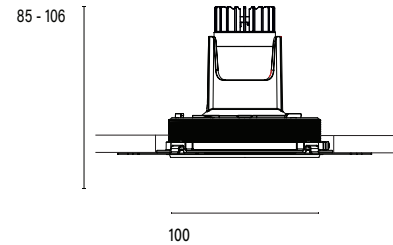

### Model

<b>Code</b>	100 10 009201.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	626lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 2

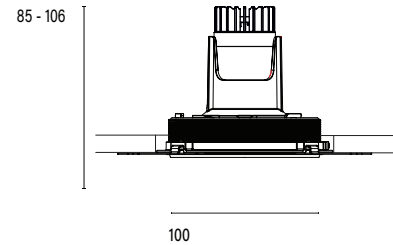


### Model

<b>Code</b>	100 10 009202.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	624lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III

## Accent 100 Trimless Type 2

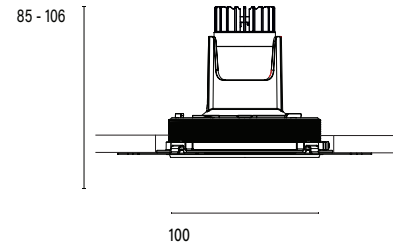

### Model



<b>Code</b>	100 10 009202.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	624lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

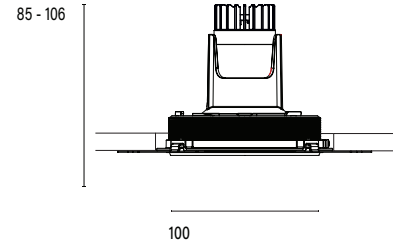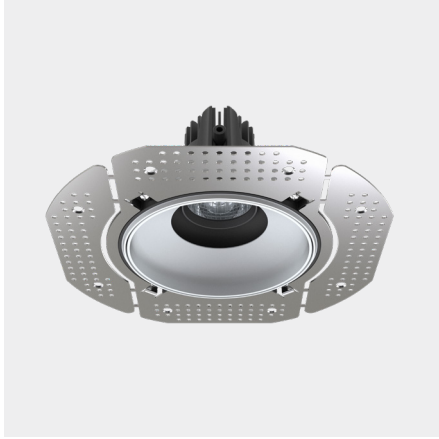

### Model


<b>Code</b>	100 10 009203.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	642lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

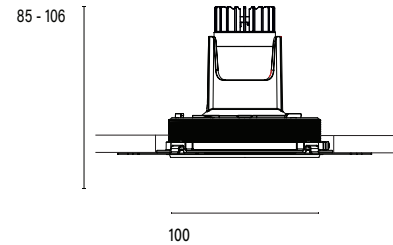

### Model



<b>Code</b>	100 10 009203.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	642lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

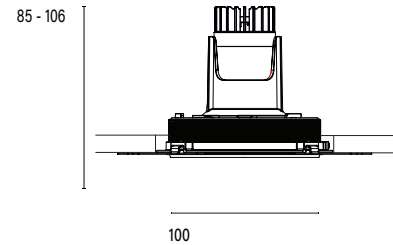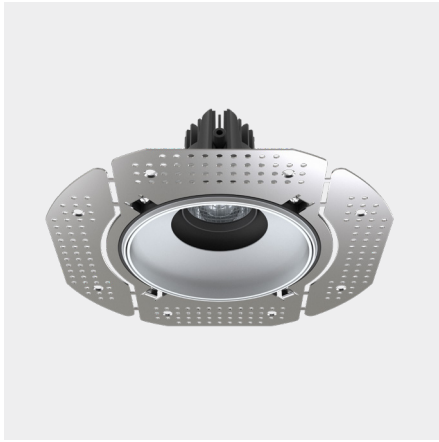


### Model

<b>Code</b>	100 10 009204.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	680lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III

## Accent 100 Recessed Type 2

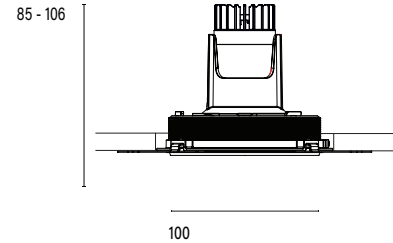

### Model



<b>Code</b>	100 10 009204.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	680lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

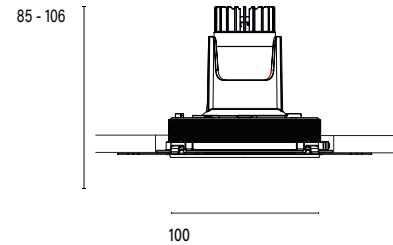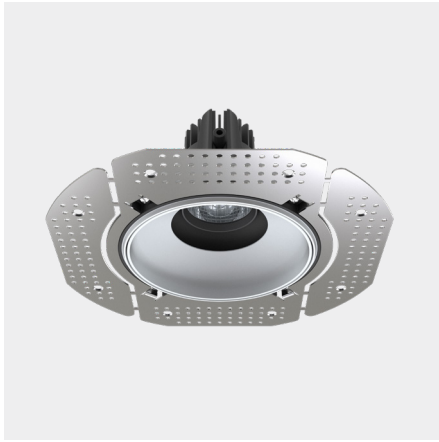

### Model


<b>Code</b>	100 10 009205.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	672lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

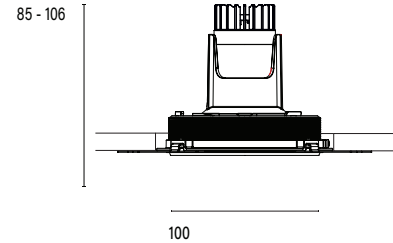

### Model

<b>Code</b>	100 10 009205.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	672lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 2

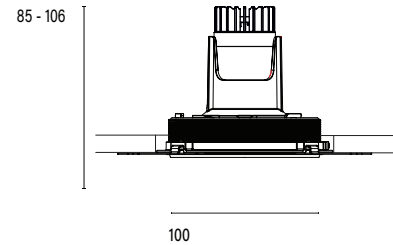

### Model


<b>Code</b>	100 10 009206.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	612lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

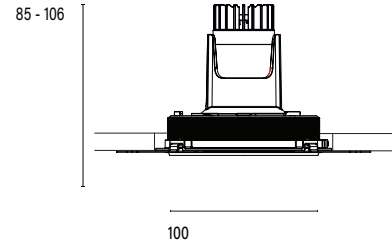

### Model


<b>Code</b>	100 10 009206.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	612lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

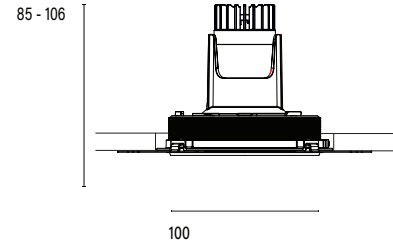

### Model


<b>Code</b>	100 10 009207.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	614lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

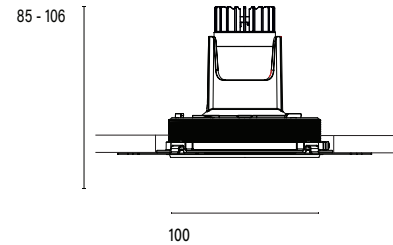

### Model



<b>Code</b>	100 10 009207.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	614lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

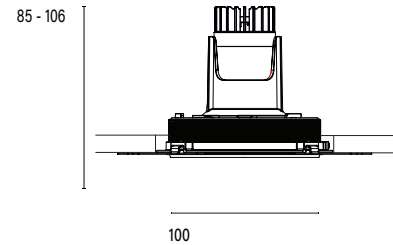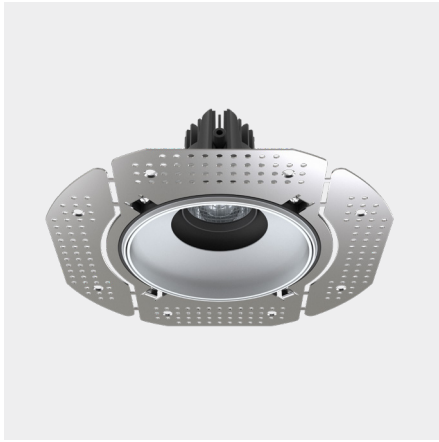

### Model


<b>Code</b>	100 10 009208.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	652lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

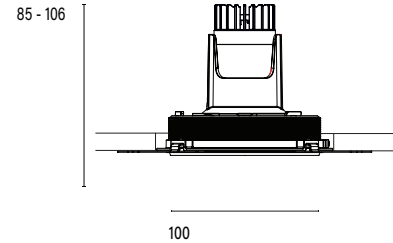

### Model



<b>Code</b>	100 10 009208.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	652lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

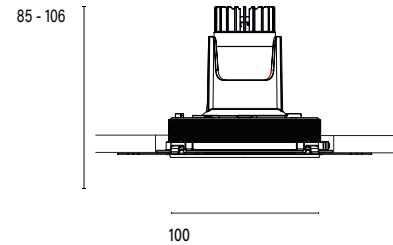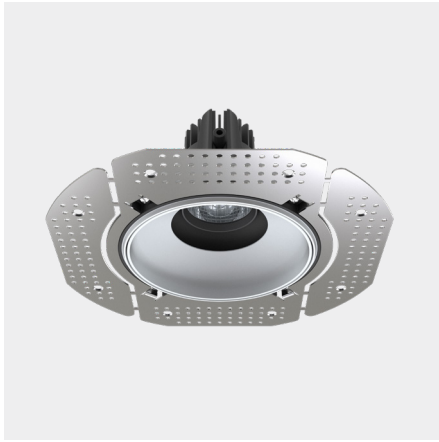

### Model


<b>Code</b>	100 10 009209.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

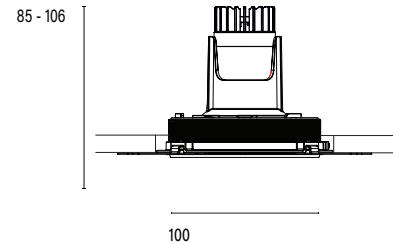

### Model

<b>Code</b>	100 10 009209.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 2

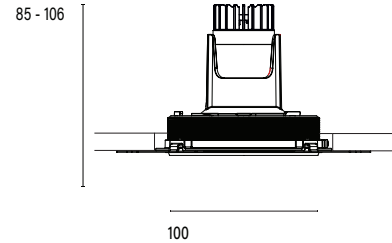

### Model



<b>Code</b>	100 10 009210.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

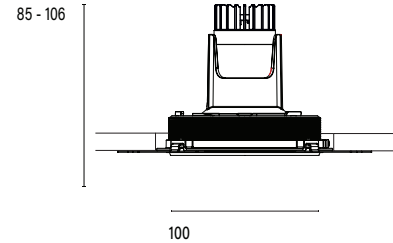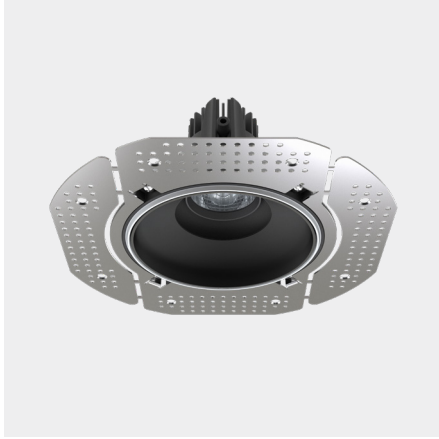

### Model


<b>Code</b>	100 10 009210.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

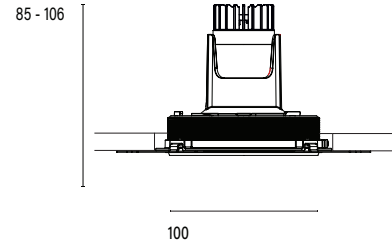


### Model

<b>Code</b>	100 10 009211.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III

## Accent 100 Trimless Type 2

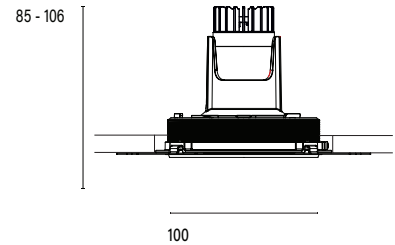

### Model


<b>Code</b>	100 10 009211.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

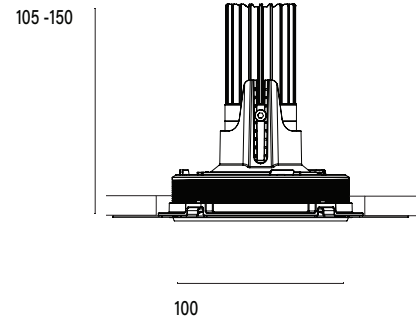

### Model



<b>Code</b>	100 10 009212.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	874lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

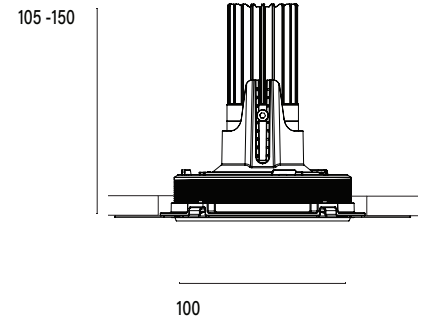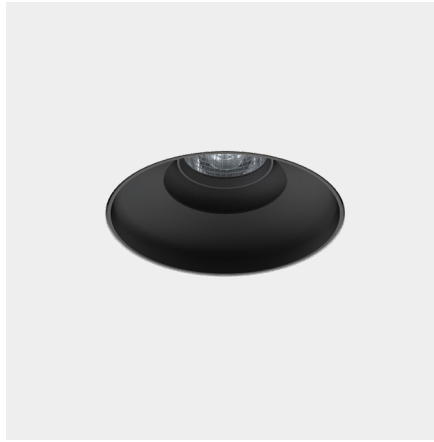

### Model


<b>Code</b>	100 10 009212.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	874lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

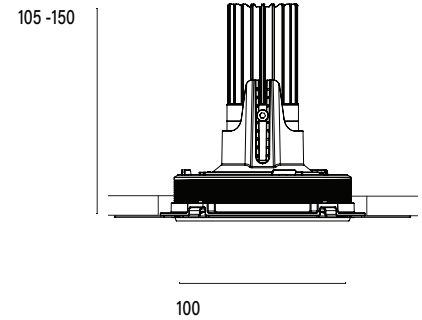

### Model



<b>Code</b>	100 10 009213.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	853lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

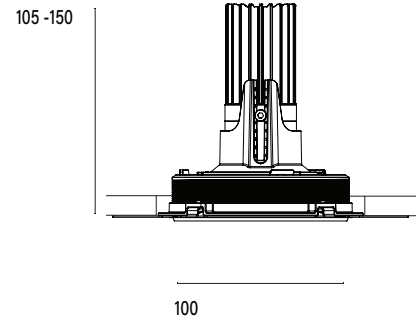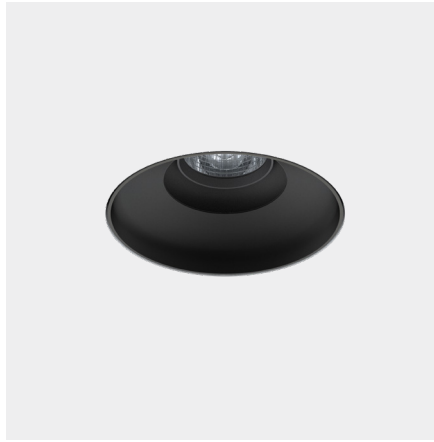

### Model

<b>Code</b>	100 10 009213.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	853lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 2

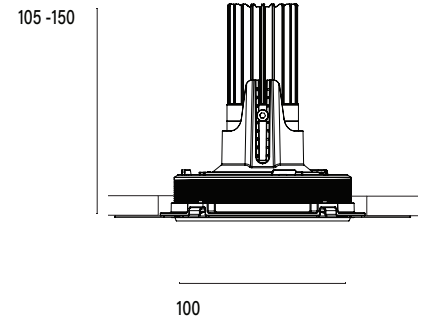

### Model



<b>Code</b>	100 10 009214.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	882lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

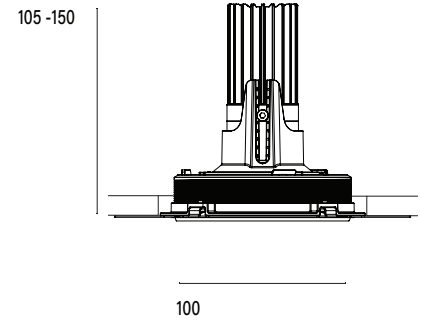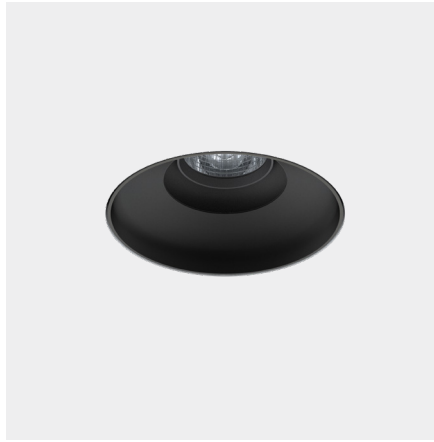

### Model


<b>Code</b>	100 10 009214.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	882lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

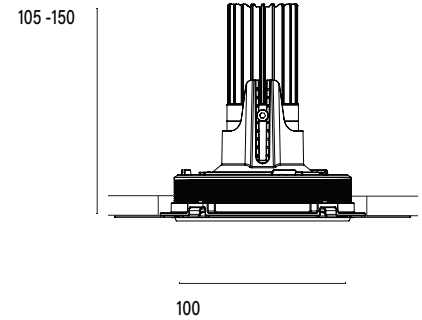

### Model



<b>Code</b>	100 10 009215.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	952lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

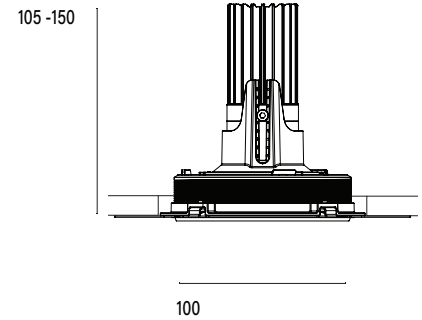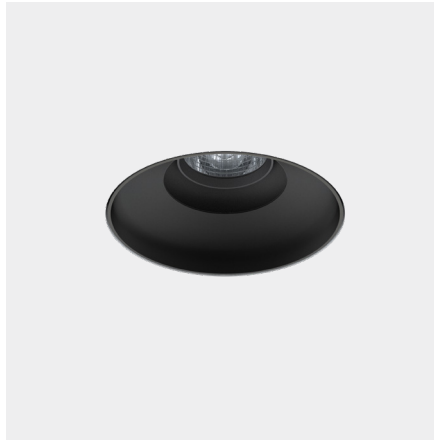

### Model


<b>Code</b>	100 10 009215.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	952lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

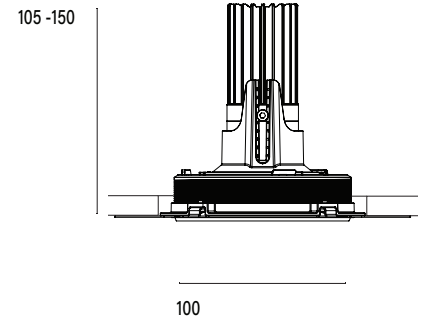

### Model



<b>Code</b>	100 10 009216.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	931lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

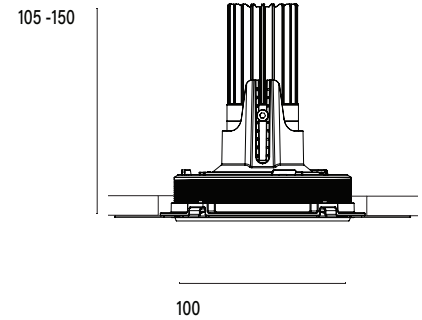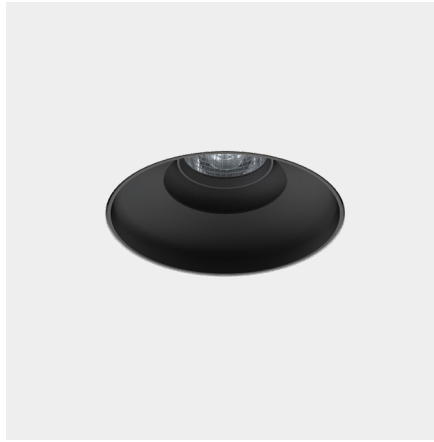

### Model


<b>Code</b>	100 10 009216.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	931lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

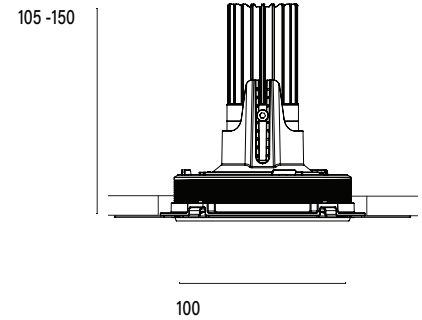

### Model


<b>Code</b>	100 10 009217.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	965lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

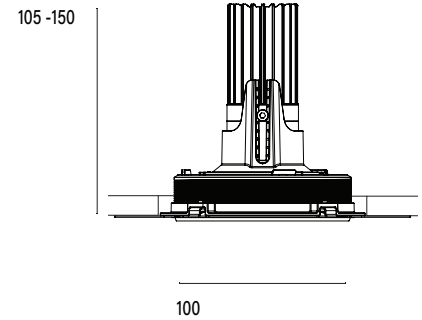

### Model

<b>Code</b>	100 10 009217.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	965lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 2

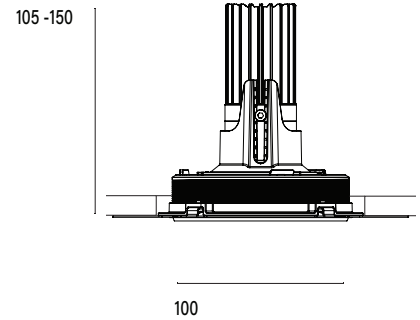

### Model



<b>Code</b>	100 10 009218.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1044lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

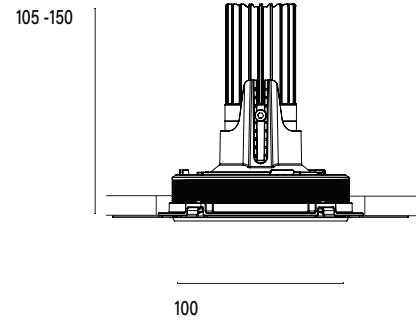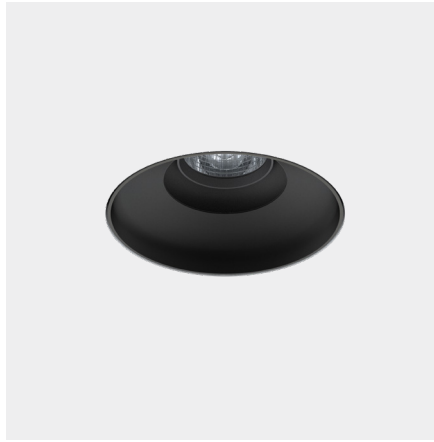

### Model


<b>Code</b>	100 10 009218.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1044lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

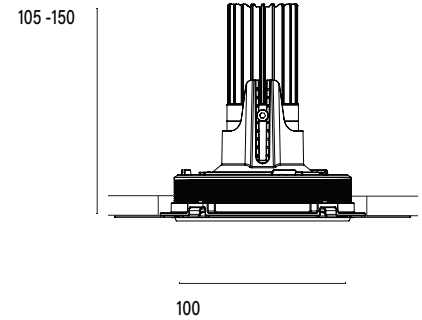

### Model



<b>Code</b>	100 10 009219.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1020lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

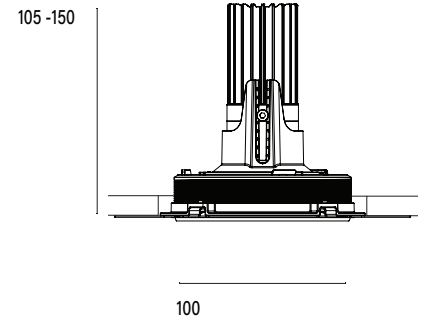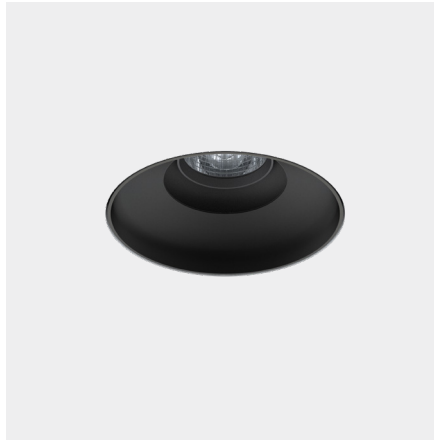

### Model


<b>Code</b>	100 10 009219.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1020lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

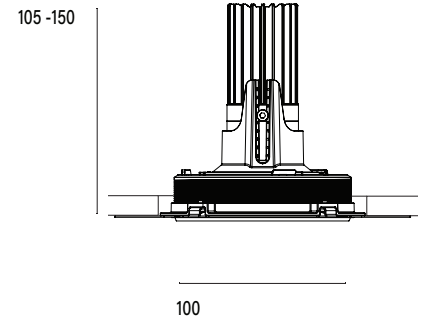

### Model



<b>Code</b>	100 10 009220.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1049lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 2

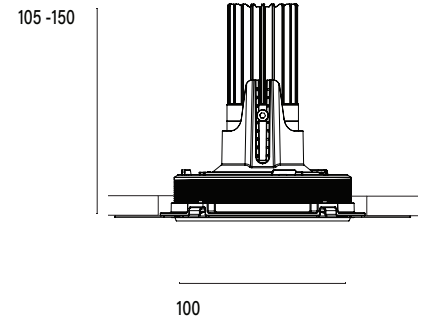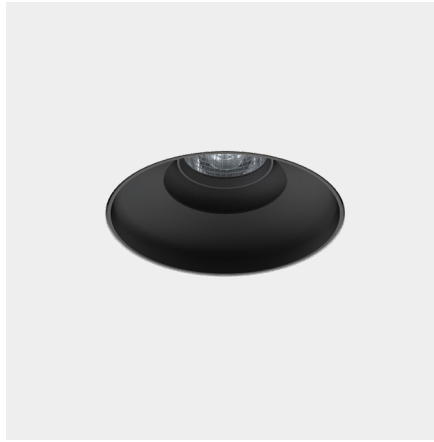

### Model



<b>Code</b>	100 10 009220.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1049lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

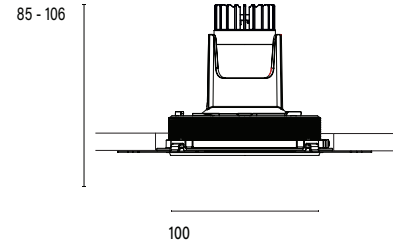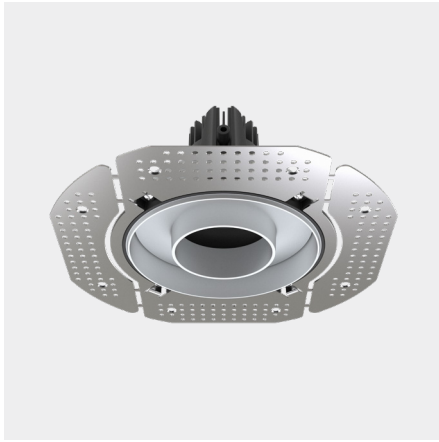

### Model



<b>Code</b>	100 10 009300.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	576lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

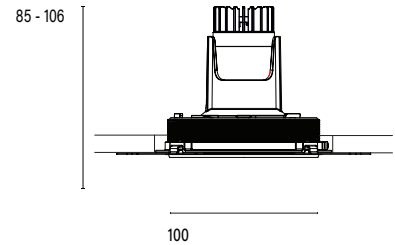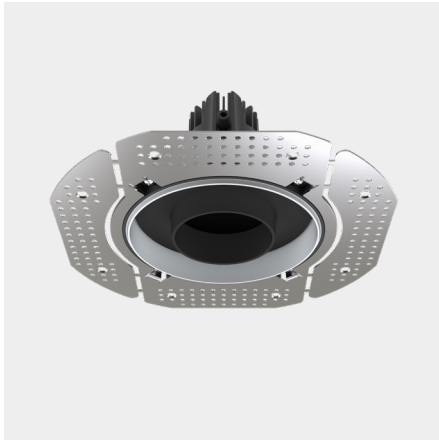

### Model

<b>Code</b>	100 10 009300.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium



### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	576lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 3

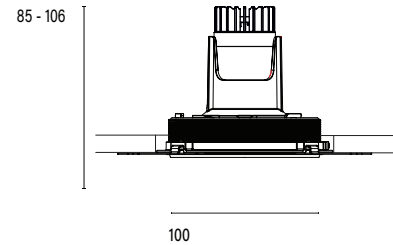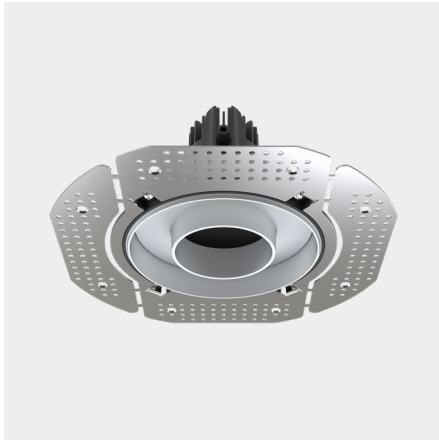

### Model



<b>Code</b>	100 10 009301.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	626lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

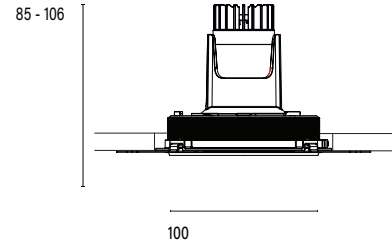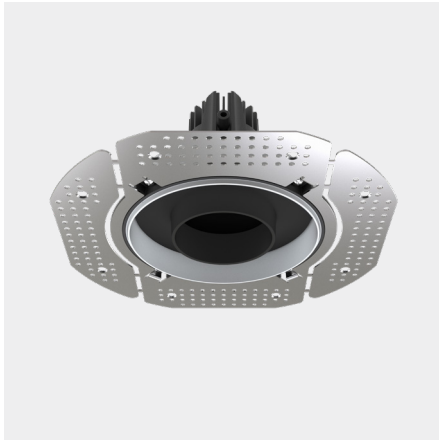

### Model



<b>Code</b>	100 10 009301.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	626lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

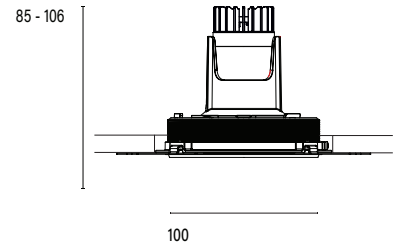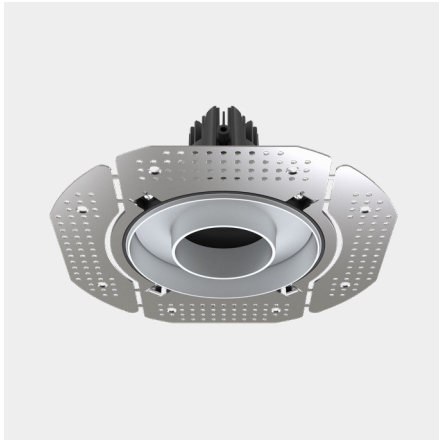

### Model



<b>Code</b>	100 10 003302.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	624lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

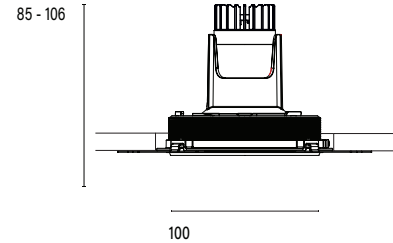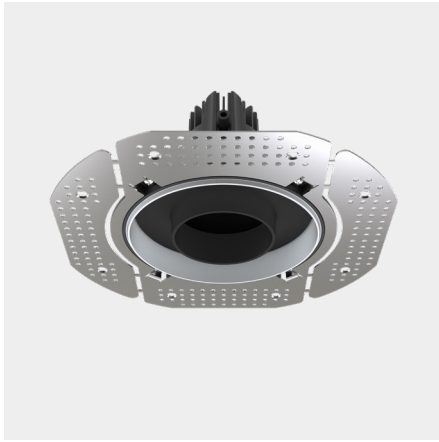

### Model



<b>Code</b>	100 10 009302.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	624lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

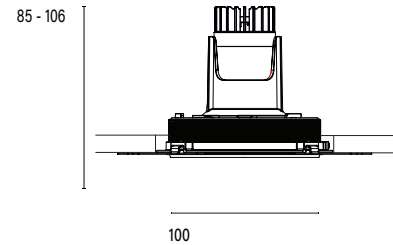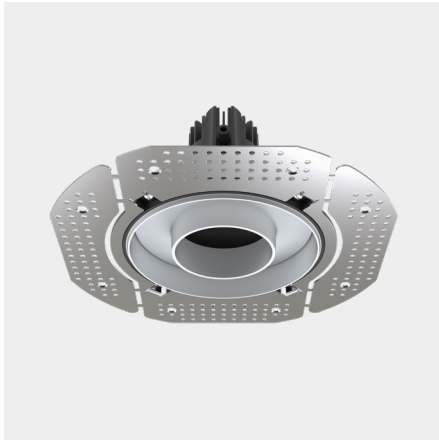

### Model



<b>Code</b>	100 10 009303.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	642lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

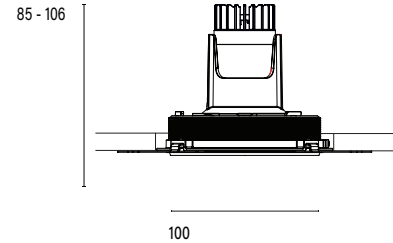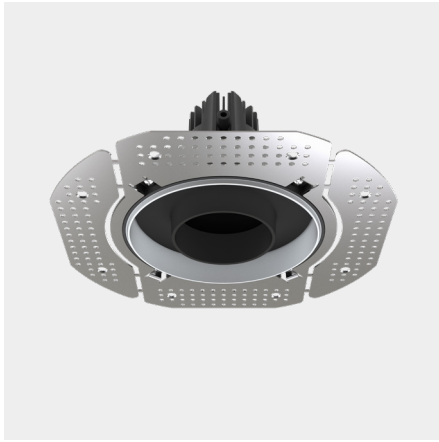

### Model



<b>Code</b>	100 10 009303.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	642lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

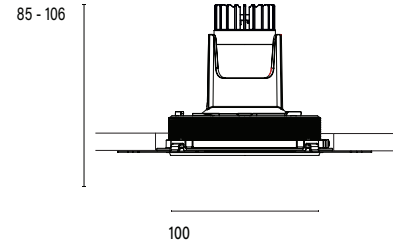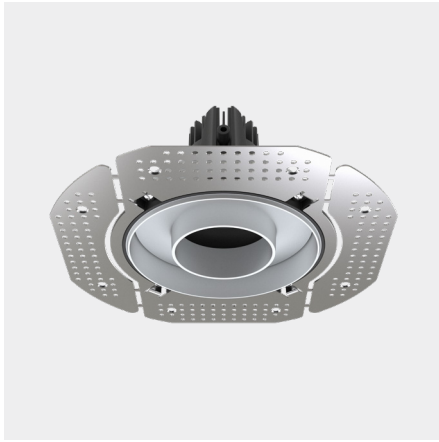

### Model



<b>Code</b>	100 10 009304.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	680lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

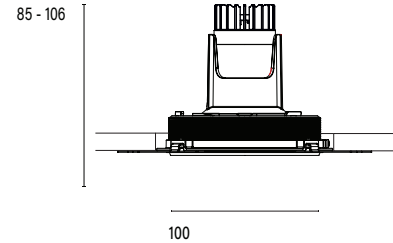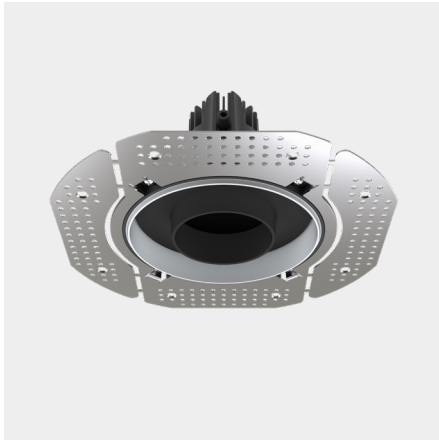

### Model

<b>Code</b>	100 10 009304.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium



### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	680lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 3

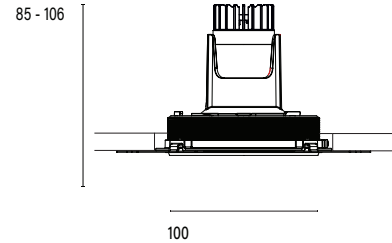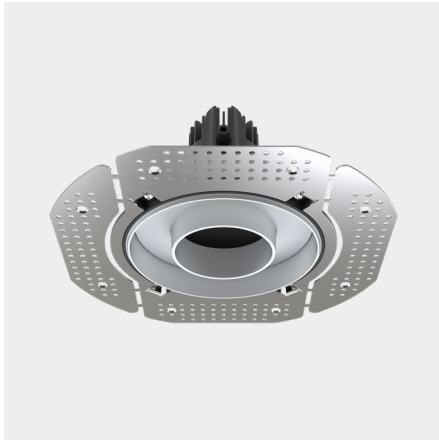

### Model



<b>Code</b>	100 10 009305.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	672lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

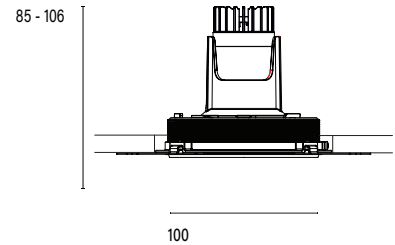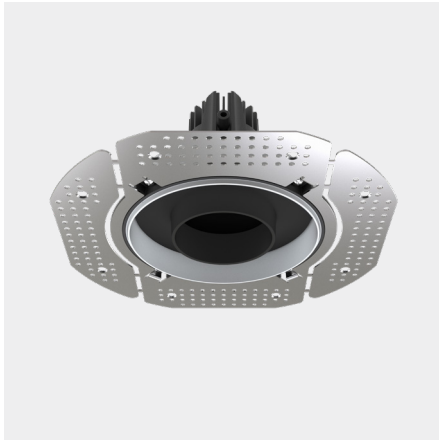

### Model



<b>Code</b>	100 10 009305.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	672lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

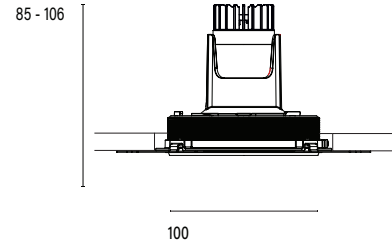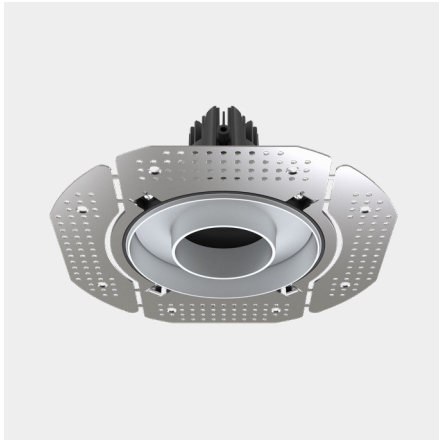

### Model



<b>Code</b>	100 10 009306.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	612lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

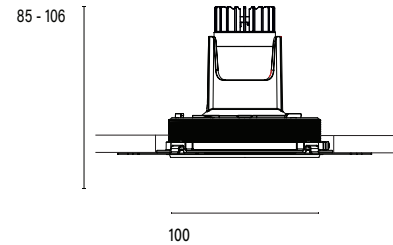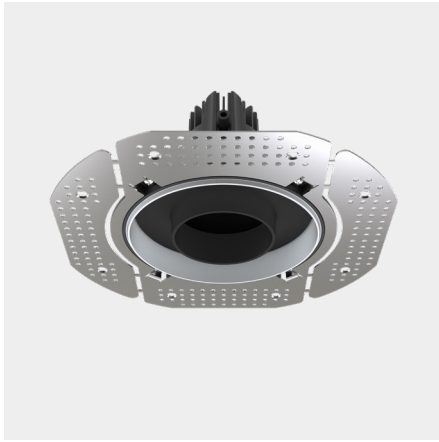

### Model



<b>Code</b>	100 10 009306.020
<b>Installation</b>	
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	612lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

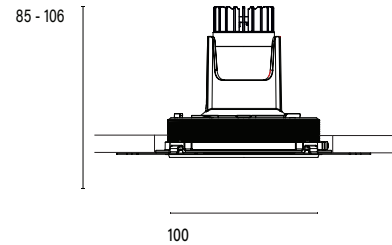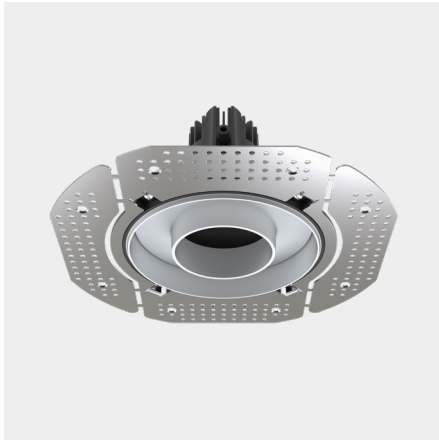

### Model



<b>Code</b>	100 10 009307010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	614lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

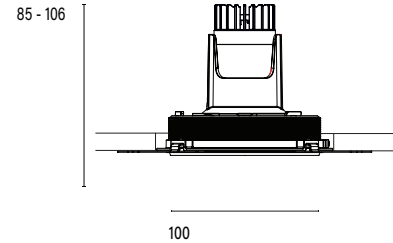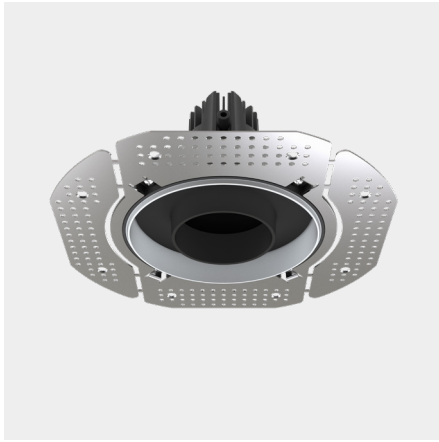

### Model



<b>Code</b>	100 10 009307020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	614lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

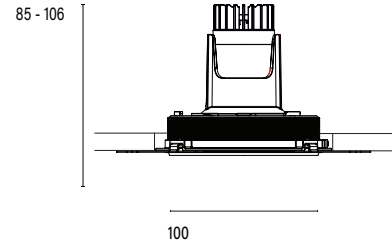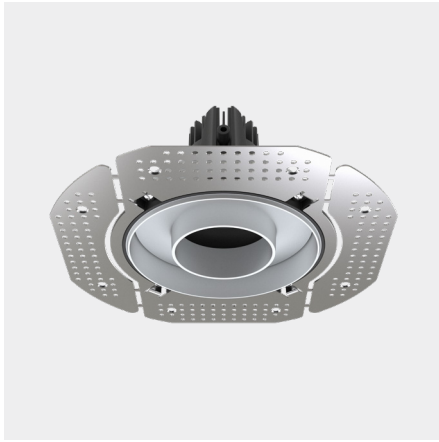

### Model



<b>Code</b>	100 10 009308.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	652lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

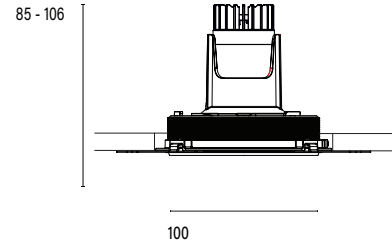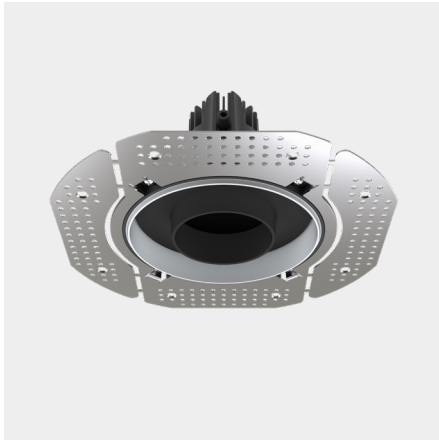

### Model

<b>Code</b>	100 10 009308.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium



### Technical Data

<b>Power (Luminaire)</b>	6.8W
<b>Power (System)</b>	8w
<b>Voltage</b>	240V-AC
<b>Current</b>	180mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	652lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 3

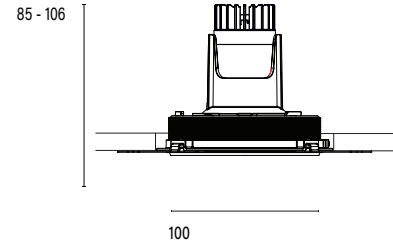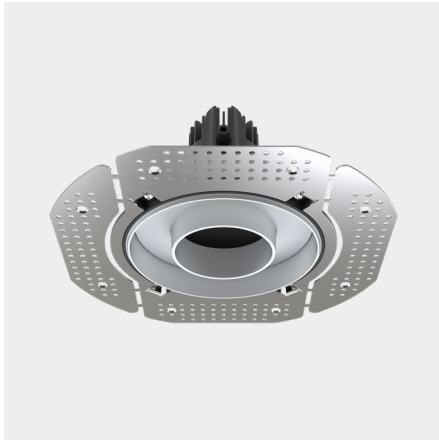

### Model



<b>Code</b>	100 10 009309.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

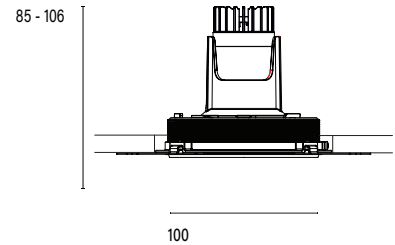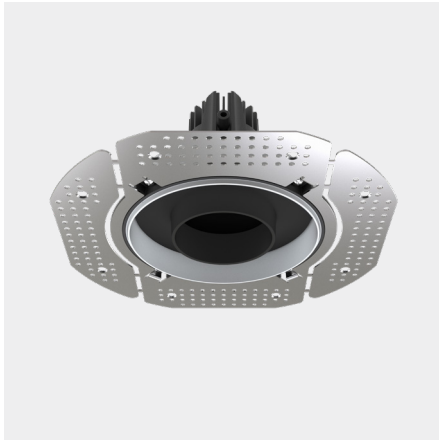

### Model



<b>Code</b>	100 10 009309.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

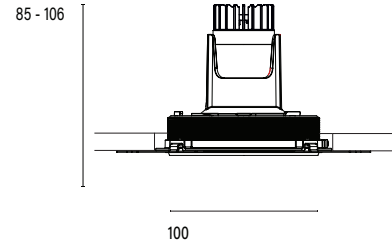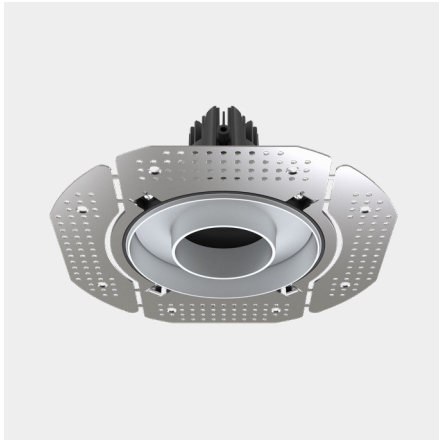

### Model



<b>Code</b>	100 10 009310.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

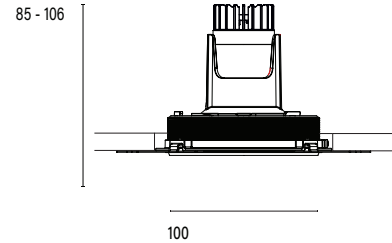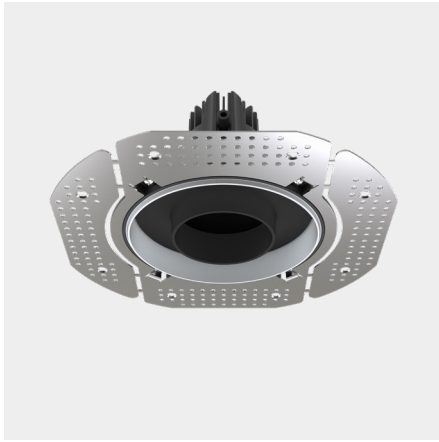

### Model



<b>Code</b>	100 10 009310.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

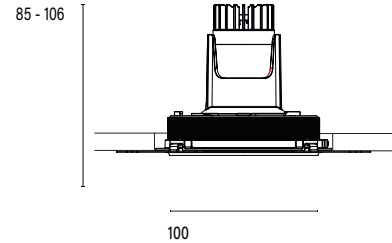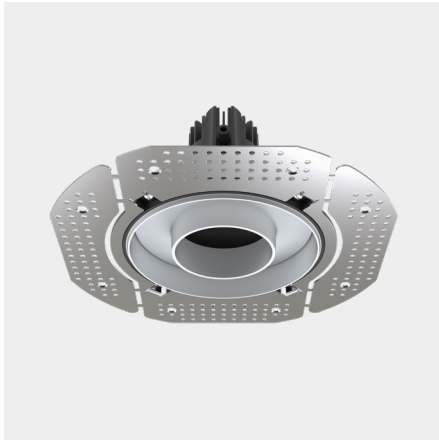

### Model



<b>Code</b>	100 10 009311.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

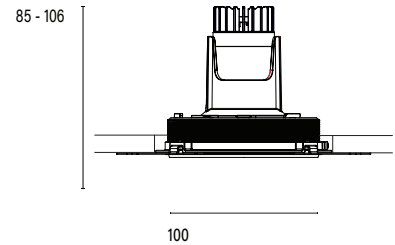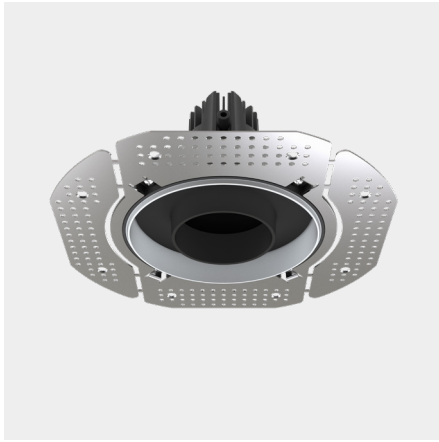

### Model


<b>Code</b>	100 10 009311.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	6W
<b>Power (System)</b>	7w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K - 1800K
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra90
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 110mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

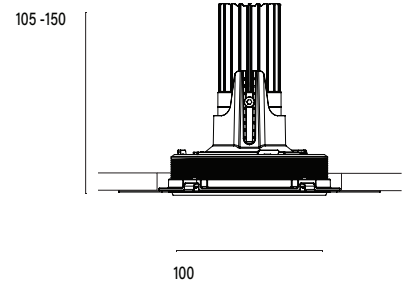

### Model


<b>Code</b>	100 10 009312.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	874lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

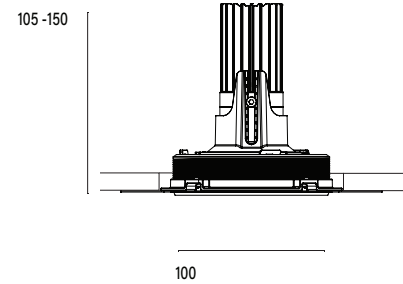

### Model

<b>Code</b>	100 10 009312.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	874lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 3

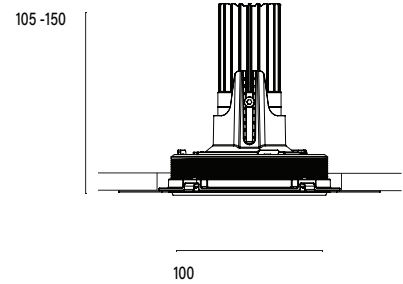

### Model


<b>Code</b>	100 10 009313.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	853lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

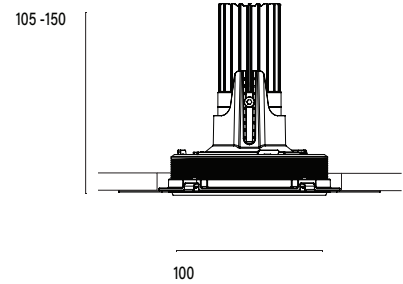

### Model


<b>Code</b>	100 10 009313.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	853lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

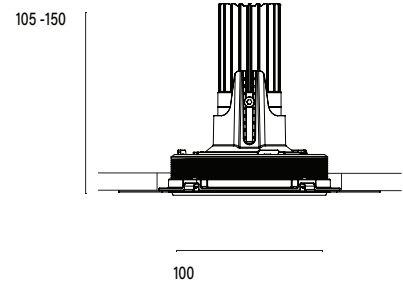

### Model


<b>Code</b>	100 10 009314.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	882lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

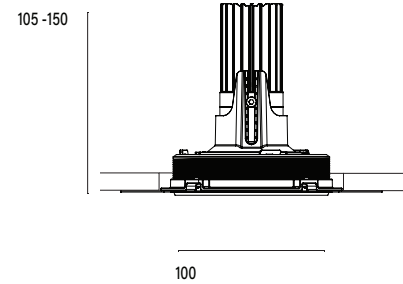

### Model


<b>Code</b>	100 10 009314.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	2700K
<b>Luminous Flux</b>	882lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

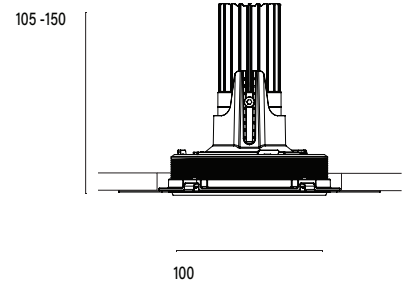

### Model


<b>Code</b>	100 10 009315.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	952lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

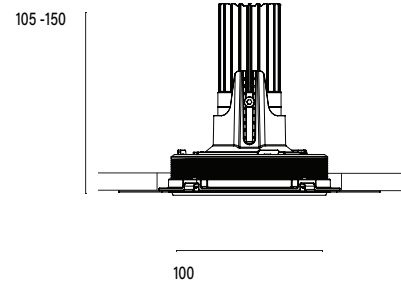

### Model


<b>Code</b>	100 10 009315.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	952lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

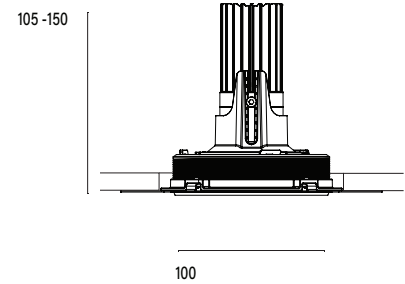

### Model


<b>Code</b>	100 10 009316.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	931lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

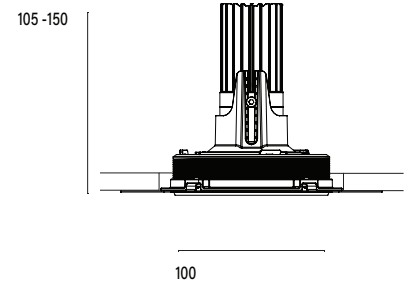

### Model

<b>Code</b>	100 10 009316.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium


### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	931lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III





## Accent 100 Trimless Type 3

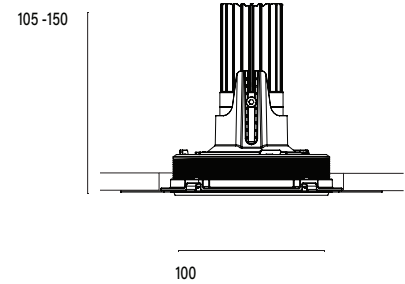

### Model


<b>Code</b>	100 10 009317.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	965lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromacity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

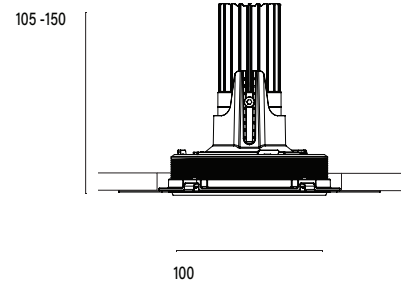

### Model


<b>Code</b>	100 10 009317.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	3000K
<b>Luminous Flux</b>	965lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

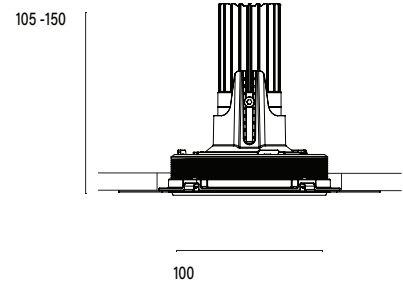

### Model


<b>Code</b>	100 10 009318.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1044lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

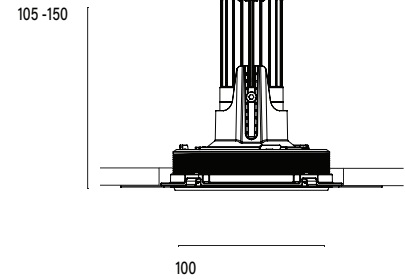

### Model


<b>Code</b>	100 10 009318.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 25°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1044lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

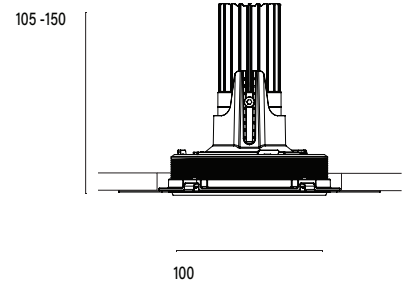

### Model


<b>Code</b>	100 10 009319.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1020lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

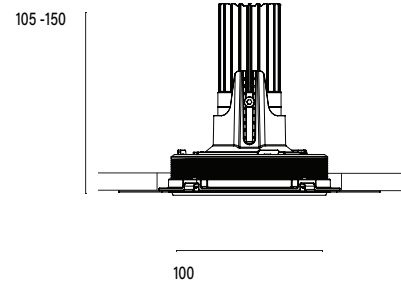

### Model


<b>Code</b>	100 10 009319.020
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured Black
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 40°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1020lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III



## Accent 100 Trimless Type 3

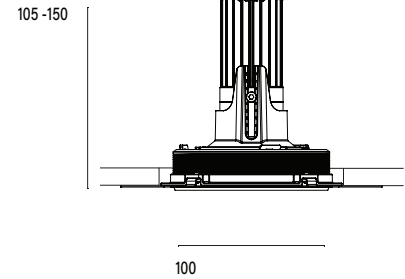

### Model

<b>Code</b>	100 10 009320.010
<b>Installation</b>	Trimless - Indoor/ Outdoor
<b>Finish</b>	Structured White
<b>Material</b>	Marine Grade Aluminium

### Technical Data

<b>Power (Luminaire)</b>	12W
<b>Power (System)</b>	14w
<b>Voltage</b>	240V-AC
<b>Current</b>	350mA
<b>Optics</b>	Rotationally Symmetrical Direct 60°
<b>Colour Temperature</b>	4000K
<b>Luminous Flux</b>	1049lm
<b>TM30</b>	Rf95 Rg103
<b>CRI</b>	Ra97
<b>Lumen Maintenance</b>	L90 B10 50000hrs
<b>Chromaticity</b>	<2 McAdam Step Ellipse
<b>Articulation</b>	Fixed
<b>Cut-Out</b>	Ø130 x 155mm
<b>Ingress Protection</b>	IP44
<b>Control Device</b>	Control Excluded
<b>Class</b>	III

